

KSED65NEE

Product family

Hood Type Chimney Cooker Hoods

Design Chimney

Extraction Ducted out or re-circulation possible

Material Painted material

Type of steel Brushed

EAN code 8017709212063

Hood width 60 cm

Aesthetics Victoria

Colour Black

Logo Silk screen



Controls

Control setting Slider

Program / Functions

No. of speeds 3

Technical Features



No. of lights

2

No. of filters

2

Light type

LED

Anti-grease filters

Aluminium

Light power

1 W

Vent outlet

150 mm

Light colour

4000 K

Minimum distance from GAS hob

750 mm

temperature scale (K)

600 m³/h

Minimum distance from ELECTRIC hob

650 mm

Free outlet maximum capacity

200 W

Non return valve

Yes

	Extraction rate IEC 61591 [m ³ /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	351	53
Speed 2	420	57

Speed 3	635	67
---------	-----	----

Performance / Energy Label


	Annual Efficiency Consumption (AEChood)	60 kWh/year	Airbourne acoustical A- weighted sound Power Emission at minimum speed (SPEmin)	53 dBA
	Energy efficiency class (EEC)	B	Airborne acoustical A- weighted sound Power Emission at maximum speed (SPEmax)	67 dBA
	Fluid Dynamic Efficiency (FDE)	26	Time increase factor (F)	1.1
	Fluid Dynamic Efficiency class (FDEC)	B	Energy Efficiency Index per first cavity	62.2
	Lighting Efficiency (LE)	100.2 lux/W	Measured air flow rate at best efficiency point (Qbep)	355 m ³ /h
	Lighting Efficiency Class (LEC)	A	Measured air pressure at best efficiency point (Qbep)	385 Pa
	Grease Filtering Efficiency (GFE)	74.4 %	Measured electric power input at best efficiency point (Wbep)	146 W
	Grease Filtering Efficiency Class (GFEC)	D	Normal Power of the light system (WI)	2 W
	Air flow at minimum speed (Qmin)	351 m ³ /h	Average illumination of the light on the cooking surface (Emiddle)	221 lux
	Maximum extraction rate	635 m ³ /h	Sound power level at highest setting (Lwa)	67 dBA

Electrical Connection

Nominal power	202 W	Power supply cable length	1000 mm
Voltage	220-240 V		
Frequency (Hz)	50-60 Hz	Plug	No

Also available

Alternative colours available	White, Stainless steel, Cream
--------------------------------------	-------------------------------

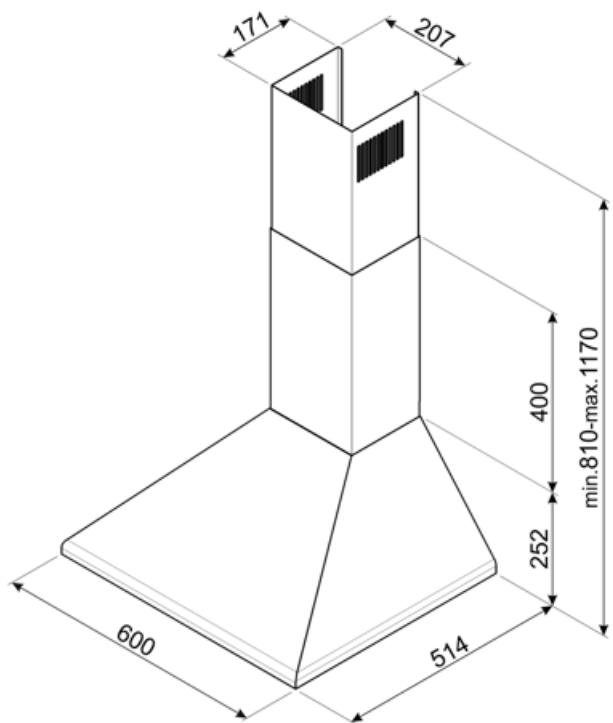

Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.

