

# KSED95BL

Product family Hood

Hood Type Decorative wall hood

Design Chimney
Extraction Extraction
Material Painted material
Type of steel Brushed

EAN code 8017709340148

Hood width 90 cm

Aesthetic Universale

Colour Black

Finishing Black

Logo Silk screen



#### **Controls**

Control setting Slider

## **Program / Functions**

No. of speeds 3

### **Technical Features**





No. of lights 2 No. of filters 3

Light typeLEDAnti-grease filtersAluminiumLight Power1 WVent outlet150 mmLight color temperature4000 KMinimum distance from750 mm

scale (K) GAS hob

Free outlet maximum 595 m³/h Minimum distance from 650 mm

capacity ELECTRIC hob

Motor power 200 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dBA]
Speed 1	328	50
Speed 2	420	57



Speed 3	588	65
------------	-----	----

## Performance / Energy Label

**Annual Efficiency** 54 kWh/a Consumption (AEChood) Energy efficieency class B (EEC) Fluid Dynamic Efficiency 25,3

588 m<sup>3</sup>/h

202 W

(FDE)

Fluid Dynamic Efficiency B class (FDEC)

Lighting Efficiency (LE) 74 lux/W Lighting Efficiency Class A

(LEC)

**Grease Filtering** 70.8 %

Efficiency (GFE)

**Grease Filtering** D Efficiency Class (GFEC)

Air flow at minumum 328 m<sup>3</sup>/h

speed (Qmin)

Air flow at maximum

speed (Qmax)

Airbourne acouistical A- 50 dBA

weighted sound Power **Emission at minimum** speed (SPEmin)

Airborne acoustical A-65 dBA weighted sound Power

**Emission at maximum** speed (SPEmax)

Time increase factor (F) 1,1 **Energy Efficiency Index** 61,2 318,4 m<sup>3</sup>/h

Measured air flow rate at best efficiency point

(Qbep)

Measured air pressure

at best efficiency point

Measured electric power input at best efficiency point (Wbep)

**Nominal Power** consumption of the light

system (WL)

Average illumination of the light on the cooking

surface (Emiddle) Sound power level at

highest setting (Lwa)

65 dBA

375 Pa

131 W

2.2 W

164 lux

### **Electrical Connection**

**Electrical connection** 

rating

220-240 V Voltage Frequency (Hz) 50-60 Hz

Power supply cable

length

Plug

1000 mm

Not present

### Also available

Alternative colours available

Stainless steel, Anthracite,


Red Wine

**Available colours** 

KSED95XE - KSED95AE -

KSED95RWE



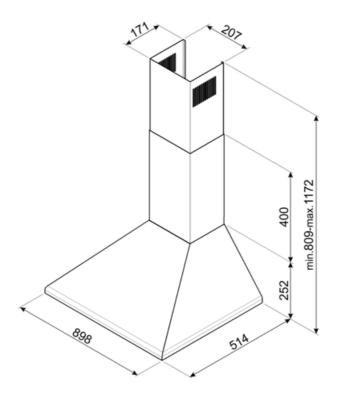



## **Compatible Accessories**

#### FLT6

Round Charcoal filters (kit 2 pieces)





#### **KITALLFC**

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



## Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.





Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.