

KSET56LX3

Product family

Hood Type	Hood
Design	Integrated (semi) hood
Extraction	Visible front panel
Material	Extraction
Type of steel	Stainless steel
EAN code	Brushed
Hood width	8017709333638
Aesthetic	56 cm
Colour	Universale
Finishing	Stainless steel
Glass Type	Satin
Serigraphy colour	Clear
Logo	Black
	Silk screen



Controls

Control setting	Slider
-----------------	--------

Program / Functions

No. of speeds	3
---------------	---

Technical Features



No. of lights	2	No. of filters	1
Light type	LED	Anti-grease filters	Aluminium
Light Power	6 W	Vent outlet	120 mm
Light color temperature scale (K)	2700 K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	237 m ³ /h	Minimum distance from ELECTRIC hob	500 mm
Motor power	75 W		

	Extraction rate IEC 61591 [m ³ /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	132	44
Speed 2	165	43

Speed 3	230	53
---------	-----	----

Accessories included


Tube reduction Yes

Performance / Energy Label

	
Annual Efficiency Consumption (AEChood)	49 kWh/a
Energy efficiency class (EEC)	C
Fluid Dynamic Efficiency (FDE)	8,4
Fluid Dynamic Efficiency class (FDEC)	E
Lighting Efficiency (LE)	20,1 lux/W
Lighting Efficiency Class (LEC)	B
Grease Filtering Efficiency (GFE)	65,1 %
Grease Filtering Efficiency Class (GFEC)	D
Air flow at minimum speed (Qmin)	130 m³/h
Air flow at maximum speed (Qmax)	225 m³/h
Airbourne acoustical weighted sound Power Emission at minimum speed (SPEmin)	A- 47 dBA
Airborne acoustical weighted sound Power Emission at maximum speed (SPEmax)	A- 55 dBA
Time increase factor (F)	1,7
Energy Efficiency Index	84,1
Measured air flow rate at best efficiency point (Qbep)	135 m³/h
Measured air pressure at best efficiency point (Pbep)	160 Pa
Measured electric power input at best efficiency point (Wbep)	72 W
Nominal Power consumption of the light system (WL)	6 W
Average illumination of the light on the cooking surface (Emiddle)	121 lux
Sound power level at highest setting (Lwa)	55 dBA

Electrical Connection

Electrical connection rating	81 W	Power supply cable length	1500 mm
Voltage	220-240 V	Plug	Not present
Frequency (Hz)	50-60 Hz		

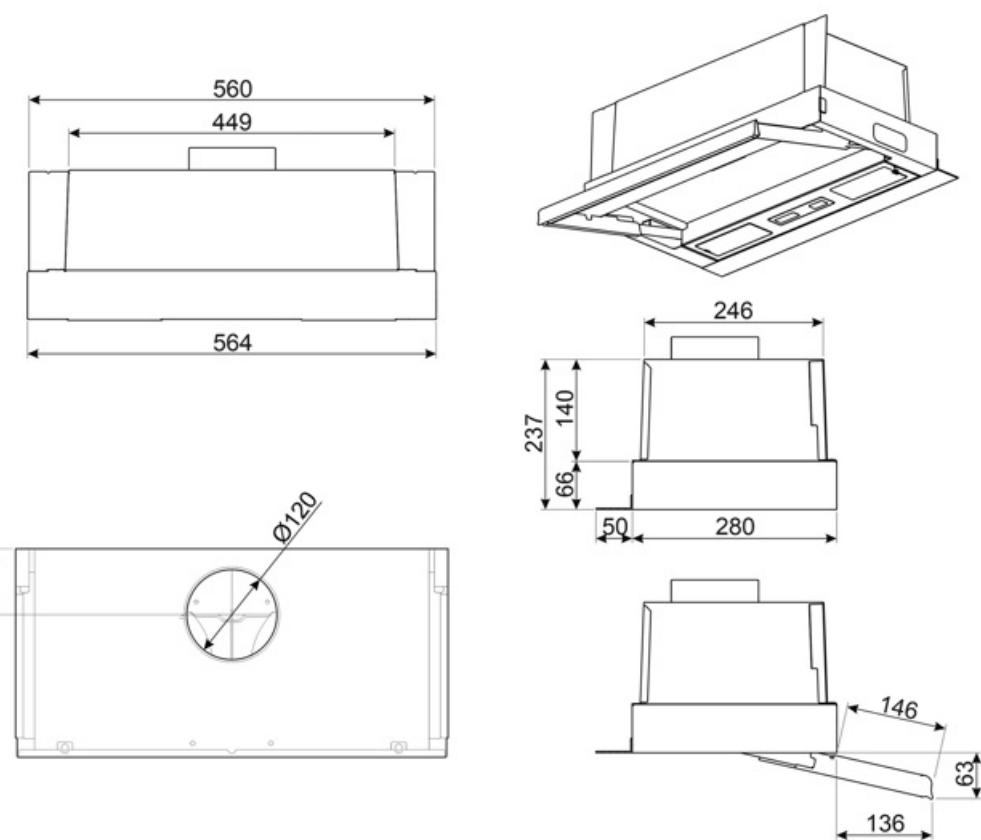



Compatible Accessories

KITFC62

Charcoal filter round (kit 2 pieces)



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.