

# KSET600XE

Product family Hood

Hood Type Integrated (semi) hood

DesignTelescopicExtractionExtractionMaterialStainless steelType of steelBrushed

**EAN code** 8017709205362

Hood width 60 cm
Aesthetic Universale
Colour Stainless steel

Finishing Satin
Serigraphy colour Black
Logo Silk screen



#### **Controls**

Control setting Slider

## **Program / Functions**

No. of speeds 3

### **Technical Features**





No. of lights 2 No. of filters 2

Light typeLEDAnti-grease filtersAluminiumLight Power3 WVent outlet150 mmLight color temperature3500 KMinimum distance from650 mm

scale (K) GAS hob

Free outlet maximum 603 m³/h Minimum distance from 500 mm

capacity ELECTRIC hob

Motor power 175 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dBA]
Speed 1	240	44
Speed 2	368	54



Speed 3	581	65
------------	-----	----

## Performance / Energy Label

**Annual Efficiency** 75 kWh/aAirbourne acouistical A- 44 dBA Consumption (AEChood) weighted sound Power **Emission at minimum** Energy efficieency class B speed (SPEmin) (EEC) Airborne acoustical A-65 dBA Fluid Dynamic Efficiency 21 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency C speed (SPEmax) class (FDEC) Time increase factor (F) 1.2 Lighting Efficiency (LE) 76.1 lux/W **Energy Efficiency Index** 69.4 Lighting Efficiency Class A 352 m<sup>3</sup>/h Measured air flow rate (LEC) at best efficiency point **Grease Filtering** 76 % (Qbep) Efficiency (GFE) Measured air pressure 354 Pa **Grease Filtering** С at best efficiency point **Efficiency Class (GFEC)** (Pbep) Air flow at minumum 240 m<sup>3</sup>/h Measured electric 165 W speed (Qmin) power input at best Air flow at maximum 581 m<sup>3</sup>/h efficiency point (Wbep) speed (Qmax) **Nominal Power** 4 W consumption of the light system (WL) Average illumination of 304 lux the light on the cooking surface (Emiddle) Sound power level at 65 dBA

### **Electrical Connection**

Frequency (Hz)


Electrical connection 181 W Power supply cable 1500 mm rating length

50-60 Hz

Voltage 220-240 V Plug Not present

highest setting (Lwa)



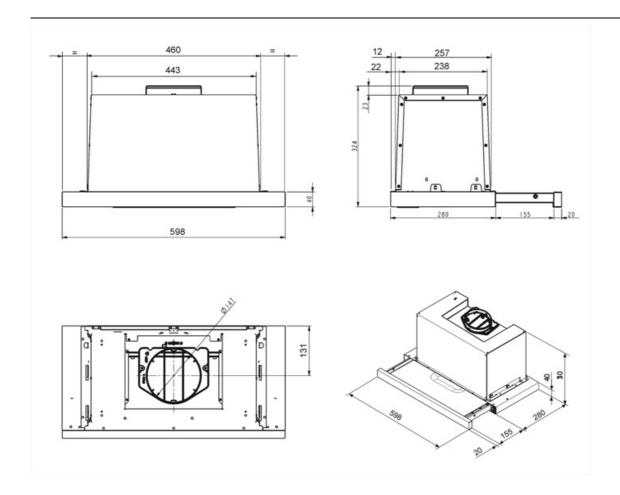



# **Compatible Accessories**

### KITFC500



Round Charcoal filters (kit 2 pieces)



## Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.





Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.