

KSET999XE

Product family	Hood
Hood Type	Telescopic Cooker Hoods
Design	Telescopic
Extraction	Ducted out or re-circulation possible
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709235123
Hood width	90 cm
Aesthetics	Universal
Colour	Silver
Serigraphy colour	Black
Logo	Silk screen



Controls

Control setting	Buttons
-----------------	---------

Program / Functions

No. of speeds	3
---------------	---

Technical Features



No. of lights	2	No. of filters	2
Light type	LED	Anti-grease filters	Aluminium
Light power	2,5 W	Vent outlet	150 mm
Light colour	3500 K	Minimum distance from GAS hob	650 mm
temperature scale (K)		Minimum distance from ELECTRIC hob	430 mm
Free outlet maximum capacity	664 m ³ /h	Non return valve	Yes
Motor power	200 W		

	Extraction rate IEC 61591 [m ³ /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	256	46
Speed 2	377	55

Speed 3	647	67
---------	-----	----

Accessories Included

Tube reduction Yes

Performance / Energy Label




	Annual Efficiency Consumption (AEChood)	39 kWh/year	Airbourne acoustical A- weighted sound Power	46 dBA
	Energy efficiency class (A EEC)		Emission at minimum speed (SPEmin)	
	Fluid Dynamic Efficiency (FDE)	33,5	Airborne acoustical A- weighted sound Power	67 dBA
	Fluid Dynamic Efficiency class (FDEC)	A	Emission at maximum speed (SPEmax)	
	Lighting Efficiency (LE)	29 lux/W	Time increase factor (F)	1,00
	Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	336 m³/h
	Grease Filtering Efficiency (GFE)	66 %	Measured air pressure at best efficiency point (Qbep)	434 Pa
	Grease Filtering Efficiency Class (GFEC)	D	Measured electric power input at best efficiency point (Wbep)	121 W
	Air flow at minimum speed (Qmin)	256 m³/h	Normal Power of the light system (WI)	5 W
	Maximum extraction rate	647 m³/h	Average illumination of the light on the cooking surface (Emiddle)	145 lux
			Sound power level at highest setting (Lwa)	67 dBA

Electrical Connection

Nominal power	205 W	Power supply cable length	1000 mm
Voltage	220-240 V		
Frequency (Hz)	50-60 Hz	Plug	No

Optional accessories

Charcoal filter KITFC400 Non return valve Yes

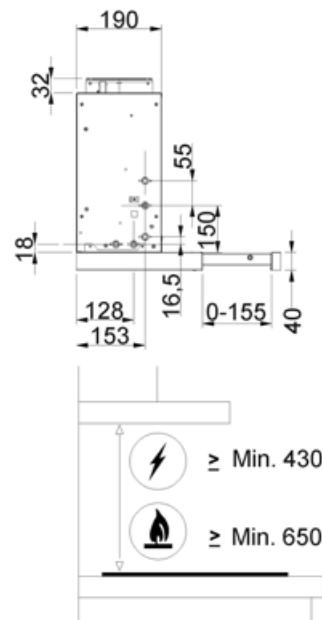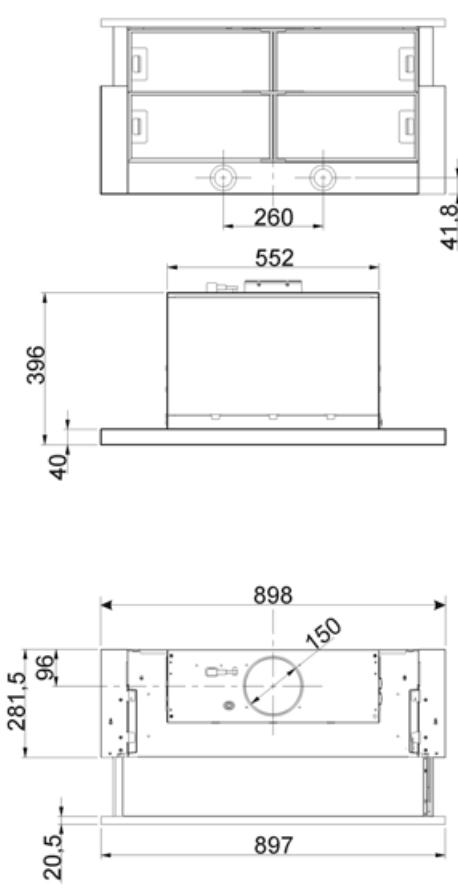



Compatible Accessories

KITFC400



Charcoal filters Kit 2 pieces

Symbols glossary

 A: Product drying performance, measured from A+++ to D / G depending on the product family



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.