

# KSG52E

Product family	Hood
Hood Type	Integrated hood
Design	Fully integrated
Extraction	Extraction
Material	Painted material
EAN code	8017709275129
Hood width	54 cm



## Aesthetics

Aesthetic Colour	Universale Silver	Serigraphy colour Logo	Black Silk screen
------------------	-------------------	------------------------	-------------------

## Controls

Control setting	Slider
-----------------	--------

## Technical Features

			
No. of lights	2	No. of filters	1
Light type	LED	Anti-grease filters	Aluminium
Light Power	3 W	Vent outlet	120 mm
Light color temperature scale (°K)	2700 °K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	232 m <sup>3</sup> /h	Minimum distance from ELECTRIC hob	500 mm
Motor power	75 W	Non return valve	Yes

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	125	45
Speed 2	155	47

Speed 3	224	54
------------	-----	----


## Performance / Energy Label



Annual Efficiency Consumption (AEChood)	50 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	45 dBA
Energy efficiency class (EEC)	C	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	54 dBA
Fluid Dynamic Efficiency (FDE)	8,8	Time increase factor (F)	1,7
Fluid Dynamic Efficiency class (FDEC)	E	Energy Efficiency Index	84,7
Lighting Efficiency (LE)	13 lux/W	Measured air flow rate at best efficiency point (Qbep)	160 m <sup>3</sup> /h
Lighting Efficiency Class (LEC)	D	Measured air pressure at best efficiency point (Pbep)	145 Pa
Grease Filtering Efficiency (GFE)	56 %	Measured electric power input at best efficiency point (Wbep)	74 W
Grease Filtering Efficiency Class (GFEC)	E	Nominal Power consumption of the light system (WL)	6 W
Air flow at minumum speed (Qmin)	125 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)	78 lux
Air flow at maximum speed (Qmax)	224 m <sup>3</sup> /h	Sound power level at highest setting (Lwa)	54 dBA

## Electrical Connection

Plug	Not present	Frequency (Hz)	50-60 Hz
Electrical connection rating	81 W	Power supply cable length	1500 mm
Voltage	220-240 V		

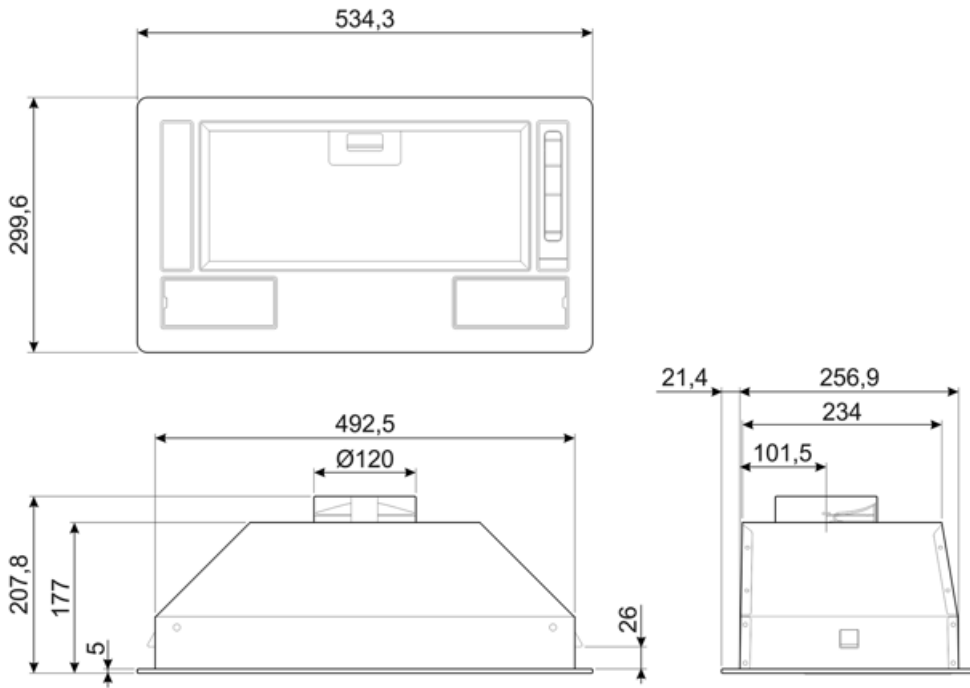

---

## Not included accessories

---

KITFC62

Charcoal filter round (kit 2 pieces)



---

## Symbols glossary (TT)

---



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.