KT100GRE

Product family	Hood
Hood Type	Decorative wall hood
Design	Chimney
Extraction	Extraction
Material	Painted material
Type of steel	Brushed
EAN code	8017709305246
Hood width	100 cm
Aesthetic	Victoria
Colour	Slate Grey
Finishing	Glossy
Logo	Applied



Controls

Control setting	Control knobs	**Control knobs**	Victoria
No. of controls	2	**Controls colour**	Steel effect

Program / Functions

No. of speeds	3
Intensive speed	BOOST

Technical Features

No. of lights	2	**No. of filters**	3
Light type	LED	**Anti-grease filters**	Aluminium
Light Power	2 W	**Vent outlet**	150 mm
Light color temperature (K)	3000 K	**Minimum distance from GAS hob**	750 mm
Free outlet maximum capacity	820 m³/h	**Minimum distance from ELECTRIC hob**	650 mm
Motor power	275 W	**Non return valve**	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	334	51
Speed 2	424	58

Speed 3	606	64
Intensive speed	787	73

Performance / Energy Label



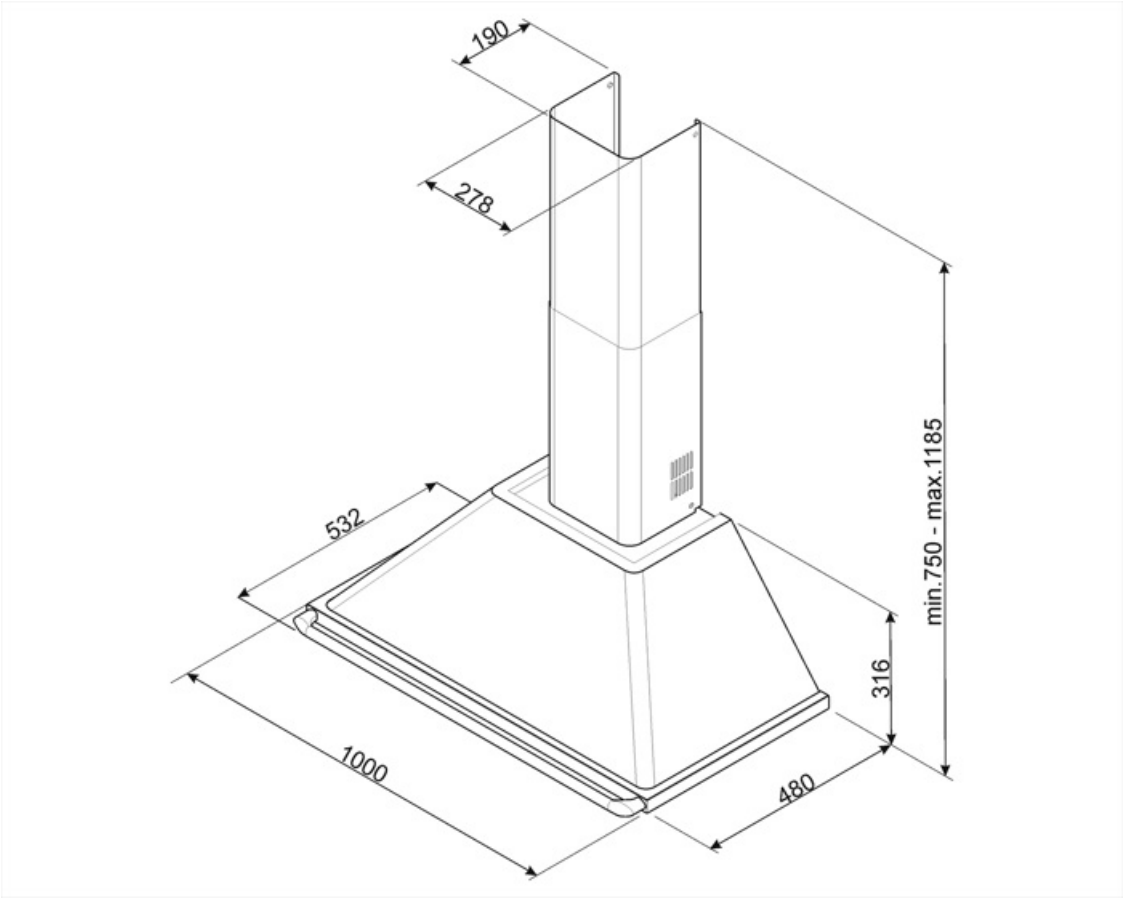
Annual Efficiency Consumption (AEChood)	48 kWh/a
Energy efficicency class (EEC)	A
Fluid Dynamic Efficiency (FDE)	34,2
Fluid Dynamic Efficiency class (FDEC)	A
Lighting Efficiency (LE)	76,8 lux/W
Lighting Efficiency Class (LEC)	A
Grease Filtering Efficiency (GFE)	81 %
Grease Filtering Efficiency Class (GFEC)	C
Air flow at minumum speed (Qmin)	334 m³/h
Air flow at maximum speed (Qmax)	606 m³/h
Air flow at boost speed (Qboost)	787 m³/h
Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	51 dBA
Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	64 dBA
Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	73 dBA
Time increase factor (F)	1,00
Energy Efficiency Index	46,2
Measured air flow rate at best efficiency point (Qbep)	412 m³/h
Measured air pressure at best efficiency point (Pbep)	478 Pa
Measured electric power input at best efficiency point (Wbep)	160 W
Nominal Power consumption of the light system (WL)	2 W
Average illumination of the light on the cooking surface (Emiddle)	169 lux
Sound power level at highest setting (Lwa)	64 dBA

Electrical Connection

Electrical connection rating	277 W	**Power supply cable length**	1000 mm
Voltage	220-240 V	**Plug**	Not present
Frequency (Hz)	50-60 Hz		

Also available

Alternative colours available	Black, Cream	**Available colours**	KT100PE; KT100BLE


190
278
532
1000
480
316
min.750 - max.1185

Compatible Accessories



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Energy efficiency class A



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.