

PL4325XIN



Product Family	Dishwashers
Commercial width	60 cm
Commercial height	82 cm
Installation	Partially-integrated built-in
N° baskets	2
EAN code	8017709244613



Programs



N. of programmes	5+5 quick programmes	Normal	Yes
Washing temperatures	38, 45, 50, 55, 65, 70 °C	Ultraclean	Yes
Soak	Yes	ECO Quick	Yes
Rapid 27'	Yes	Delicate and Quick	Yes
Glass	Yes	Normal Quick	Yes
ECO	Yes	Strong and fast	Yes

Options



Enersave option	Yes	Options for tabs	Yes
Delay timer option	Up to 24 hours	FlexiTabs	
1/2 load FlexiZone option	Yes	Quick Time option	Yes

Baskets



Basket colour	Grey	Lower Basket	With 4 foldable racks
Basket components colour	Grey	Lower basket with anti-drip inserts	Yes
Handle	In plastic with stainless steel insert on upper and lower basket	Largest loadable dish in lower basket	30,0 cm

Upper Basket	With central fixed racks	Colour Inner Components	Grey anti drop inserts, Grey handles, Grey pastic plate for regulation second basket on three levels, Green Planetarium
Height adjustment of the upper basket	On three levels (5 cm)		
Largest loadable dish in upper basket	23,5 cm	Cutlery basket	13 place settings sliding


Technical Features



Width (mm)	598 mm	Flood protection system	Total Acquastop
Depth (mm)	570 mm	Water supply	Single; cold/hot water max. 60°C - energysave with hot water up to 35%
Display type	LED display (4 digit)	Max water hardness	100°FH;58°dH
Product Height (mm)	818 mm	Drying system	Natural condenser drying, with EnerSave automatic door opening system at the end of the cycle
Controls	Electronic	Steam protection	In plastic
Display	Delayed start, Programme time indicator, Time to end indication	Tube material	Stainless steel
Programme graphics	Symbols	Filter	Stainless steel
On/off indicator	Yes	Concealed heating element	Yes
Salt light indicator	Light	Hinges	Self balancing with variable hinges
Rinse aid indicator	Light	Adjustable feet	7 cm, from 820 to 890 mm
Progress indicator	Yes	Additional gaskets	Yes, with stainless steel plate
End of cycle indicator	On display, with acoustic signal	Back cover	Yes, with covered counterweight
Washing system	Planetarium	Depth of dishwasher with open door (mm)	1146 mm
Third spray arm	Single	Back feet adjustable from front	Yes
Water softener	With electronic setting	Top cover	In plastic

Electrical Connection

Connected power	1800 W	Type of connection	Single-phase
Current	10 A	Power supply cable length	140 cm
Voltage	220-240 V	Plug	(F;E) Schuko
Frequency (Hz)	50 Hz		

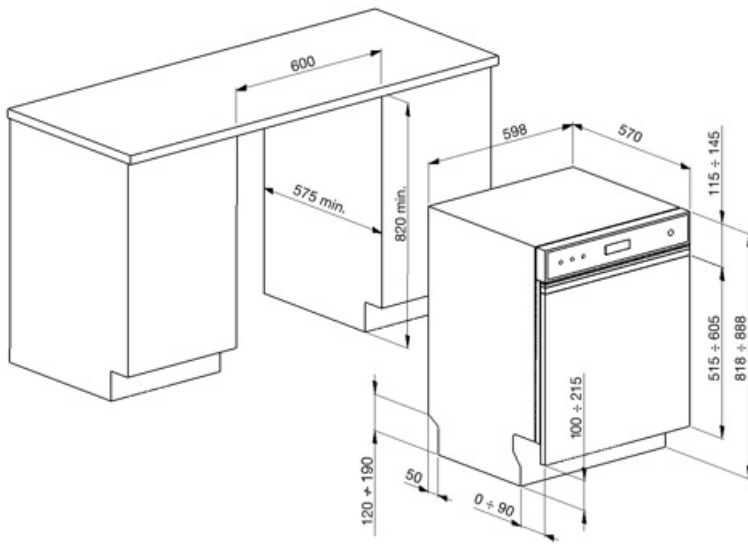

Compatible Accessories



KITGH

Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks



KITPL60N

Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2



KITPL60B



















Toekick Kit in White colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITPL60X

Toekick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

Symbols glossary

 To improve the drying of dishes without leaving stains.	 A+++: Appliances with this symbol can reduce energy consumption by a further 30% from the standard A energy rating.
 82 cm high	 Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.
 Fingerprint proof stainless steel: Fingerprint proof stainless steel keeps stainless steel looking as good as new.	 Ideal for multi-function detergents, this option allows washing to be optimised, with full benefits from the combined-action tablets. When this option is activated, any salt and rinse aid is used.
 FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.	 Noise Level: Excellent insulation and special devices keep noise to a minimum.
 The Planetarium washing system, with high rotations per minute, guarantees complete coverage of the tank, thanks to the simultaneous rotation of base and sprayers, and excellent washing results.	 Delicate Quick: Program Delicate Quick is suitable for quick washing of delicate dishes.
 Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.	 Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.
 Normal Quick: Program Normal Quick is suitable for quick washing of mixed dishes, for everyday use.	 Soak programme: The soak programme provides a rinse to prevent dirt from drying.
 Strong&Fast: This special programme takes less than 1 hour to eliminate the most stubborn dirt and dried on residues.	 13 place settings: Number of place settings.
 Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.	 System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.