


## SA661X2



### Product Family

Built-in type	Hob
Dimensions	Ultra-low profile
Power supply	60 cm
Type	Electric
EAN code	Ceramic
	8017709265731

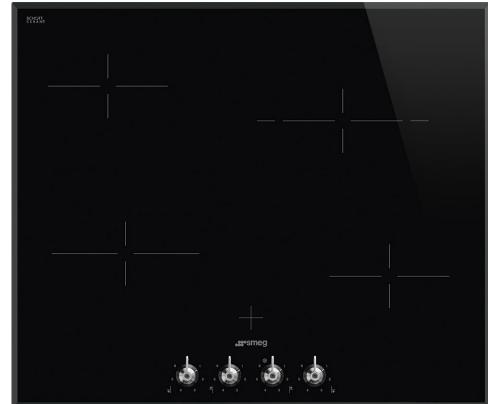

## Aesthetics



Aesthetic	Classic
Colour	Black
Finishing	Glass
Material	Glass
Glass type	Ceramic
Glass edge	Angled edge
Type of control setting	Control knobs
Control knob position	Front
No. of controls	4
Controls colour	Steel effect
Logo	Silk screen
Serigraphy colour	Grey

## Program / Functions

No. of ceramic cook zones	4
Total no. of cook zones	4

## Options

Standard cut out	490x560 mm
------------------	------------

## Technical Features

Front-left - Ceramic - Single - 1.80 kW - Ø 18.4 cm


Rear-left - Ceramic - Single - 1.20 kW - Ø 14.8 cm

Rear-right - Ceramic - Double - 1.00 - 2.20 kW - Ø 14.8 - Ø 21.4 cm

Front-right - Ceramic - Single - 1.20 kW - Ø 14.8 cm

## Electrical Connection

<b>Electrical connection rating (W)</b>	6400 W	<b>Type of electric cable supplied</b>	Yes, Three and Single/Two-phase
<b>Current</b>	19 A	<b>Frequency (Hz)</b>	50/60 Hz
<b>Voltage (V)</b>	220-240 V	<b>Power supply cable length</b>	120 cm
<b>Voltage 2 (V)</b>	380-415 V	<b>Terminal box</b>	6 poles
<b>Type of electric cable</b>	Double universal	<b>Plug</b>	No

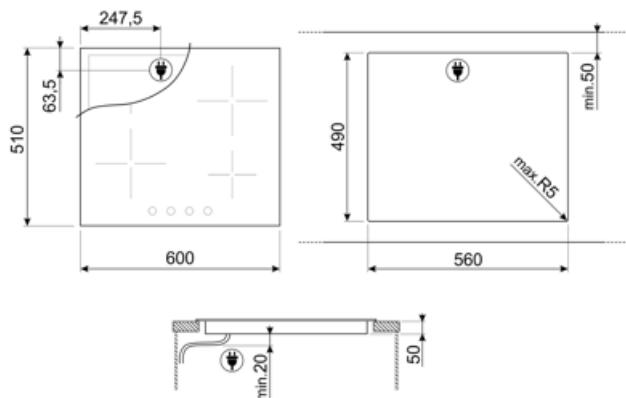

---

## Compatible Accessories

---



**SCRP**

Induction and ceramic hobs and teppanyaki scraper

## Symbols glossary



Ultra-low profile: Installation of product with flat edge - height of 1 mm.



Knobs control



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light.



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.