SAIB1643DG

Product Family	Hob
Built-in type	Ultra-low profile or Fully Flushed
Dimensions	60 cm
Power supply	Electric
Type	Induction
EAN code	8017709347192



Aesthetics

Aesthetic	Universale
Colour	Neptune Grey
Finishing	Glass
Material	Glass
Glass type	Ceramic
Glass edge	Straight edge
Type of control setting	Touch controls
Slider	Red
Control knob position	Front
Logo	Silk screen
Serigraphy colour	Grey

Program / Functions

No. of induction cook zones	4
Time-setting options	Automatic Shutdown
No. of cooking zones with booster	4
No. of Flexible zones	2
Main on/off switch	Yes
Power levels	9
Total no. of cook zones	4

Options

Flexible Zone Type	Bridge	**Residual time indicator**	Yes
Standard cut out	478-482x555-560 mm	**Limited Power Consumption Mode**	Yes
End cooking timer	4	**Control Lock / Child Safety**	Yes
Minute minder	1	**Bridge option**	Yes
End of cooking alarm	Yes		


Technical Features

Front-left - Induction - Single - 1.50 kW - Booster 2.00 kW - Ø 18.0 cm
Rear-left - Induction - Single - 1.50 kW - Booster 2.00 kW - Ø 18.0 cm
Rear-right - Induction - Single - 1.50 kW - Booster 2.00 kW - Ø 21.0 cm
Front-right - Induction - Single - 1.20 kW - Booster 1.60 kW - Ø 14.5 cm

Left Multizone dimension	38.5x18.0 cm	**Automatic switch off when overheat**	Yes
Automatic setting according to pan dimension	Yes	**Residual heat indicator**	Yes
pan detection	Yes, min 9 cm	**Protection against accidental start up**	Yes
Minimum pan diameter indication	Yes		

Electrical Connection

Electrical connection rating (W)	7200 W	**Type of electric cable**	Yes, Double and Three Phase
Current	32 A	**Frequency (Hz)**	50/60 Hz
Voltage (V)	220-240 V	**Power supply cable length**	120 cm
Voltage 2 (V)	380-415 V	**Plug**	No
Type of electric cable	Single phase		

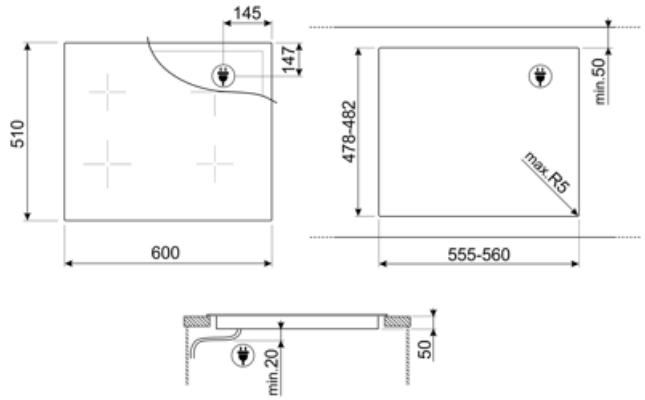

Compatible Accessories



SCRP

Induction and ceramic hobs and teppanyaki scraper

Symbols glossary



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



CUT_OUT_STANDARD_72dpi



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.



Min diameter pot detection of 9 cm.



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



ECO-logic: option allows you to restrict the power limit of the appliance real energy saving.



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



Time elapsed: shows how long the cooking zone has been in use.



TWIN_ZONE_72dpi



Touch control