# SE264TD1

| | |
|---|---|
| **Product Family** | Hob |
| **Built-in type** | Ultra-low profile or Fully Flushed |
| **Dimensions** | 60 cm |
| **Power supply** | Electric |
| **Type** | Ceramic |
| **EAN code** | 8017709312039 |



## Aesthetics

| | |
|---|---|
| **Aesthetic** | Universale |
| **Colour** | Black |
| **Finishing** | Glass |
| **Material** | Glass |
| **Glass type** | Ceramic |
| **Glass edge** | Straight edge |
| **Type of control setting** | Digi Touch |
| **LED colours** | Red |
| **Control knob position** | Front |
| **Logo** | Silk screen |
| **Serigraphy colour** | Grey |

## Program / Functions

| | |
|---|---|
| **No. of ceramic cook zones** | 4 |
| **Main on/off switch** | Yes |
| **Power levels** | 9 |
| **Total no. of cook zones** | 4 |

## Options

| | | | |
|---|---|---|---|
| **Worktop Cut-Out** | 490x560 mm | **Residual time indicator** | Yes |
| **End cooking timer** | 4 | **Showroom Demo Option** | Yes |
| **Minute minder** | 1 | | |

| | | | |
|---|---|---|---|
| **End of cooking alarm** | Yes | **Control Lock / Child Safety** | Yes |

## Technical Features





Rear-left - Ceramic - Single - 2.10 kW - Ø 21.0 cm
Front-left - Ceramic - Single - 1.20 kW - Ø 14,5 cm
Rear-right - Ceramic - Single - 1.80 kW - Ø 18.0 cm
Front-right - Ceramic - Single - 1.20 kW - Ø 14.5 cm

| | | | |
|---|---|---|---|
| **Automatic switch off when overheat** | Yes | **Residual heat indicator** | Yes |
| **Automatic switch off when overflow** | Yes | | |

## Electrical Connection

| | | | |
|---|---|---|---|
| **Electrical connection rating (W)** | 6300 W | **Frequency (Hz)** | 50/60 Hz |
| **Current** | 27 A | **Power supply cable length** | 130 cm |
| **Voltage (V)** | 220-240 V | **Terminal box** | 4 poli |
| **Voltage 2 (V)** | 380-415 V | **Plug** | Not present |
| **Type of electric cable installed** | Yes, Single and Double phase | | |

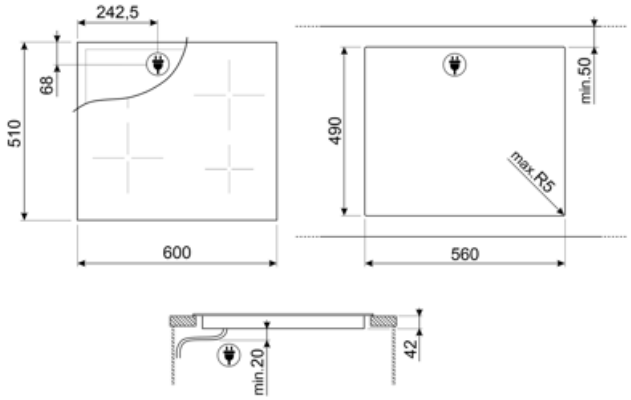

## Compatible Accessories



**SCRP**

Non-scratch hob scraper - suitable for induction and ceramic hobs

## Symbols glossary



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.




Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.



Time elapsed: shows how long the cooking zone has been in use.




Touch control



Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light.



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.