

# SE264TD1



<b>Product Family</b>	Hob
<b>Built-in type</b>	Ultra-low profile or Fully Flushed
<b>Dimensions</b>	60 cm
<b>Power supply</b>	Electric
<b>Type</b>	Ceramic
<b>EAN code</b>	8017709312039



## Aesthetics



<b>Aesthetic</b>	Universale
<b>Colour</b>	Black
<b>Finishing</b>	Glass
<b>Material</b>	Glass
<b>Glass type</b>	Ceramic
<b>Glass edge</b>	Straight edge
<b>Type of control setting</b>	Digi Touch
<b>LED colours</b>	Red
<b>Control knob position</b>	Front
<b>Serigraphy colour</b>	Grey

## Programs / Functions

<b>No. of ceramic cook zones</b>	4
<b>Main on/off switch</b>	Yes
<b>Power levels</b>	9
<b>Total no. of cook zones</b>	4

## Options



<b>Worktop Cut-Out</b>	490x560 mm	<b>Residual time indicator</b>	Yes
<b>End cooking timer</b>	4	<b>Showroom Demo Option</b>	Yes
<b>Minute minder</b>	1	<b>Control Lock / Child Safety</b>	Yes
<b>End of cooking alarm</b>	Yes		

## Technical Features



Rear-left - Ceramic - Single - 2.10 kW - Ø 21.0 cm  
 Front-left - Ceramic - Single - 1.20 kW - Ø 14,5 cm  
 Rear-right - Ceramic - Single - 1.80 kW - Ø 18.0 cm  
 Front-right - Ceramic - Single - 1.20 kW - Ø 14.5 cm

Automatic switch off when overheat Yes


Residual heat indicator Yes

Automatic switch off when overflow Yes

## Electrical Connection

Plug Not present  
 Electrical connection rating (W) 6300 W  
 Current 27 A  
 Voltage (V) 220-240 V  
 Voltage 2 (V) 380-415 V

Type of electric cable installed Yes, Single and Double phase  
 Frequency (Hz) 50/60 Hz  
 Power supply cable length 130 cm  
 Terminal box 4 poli

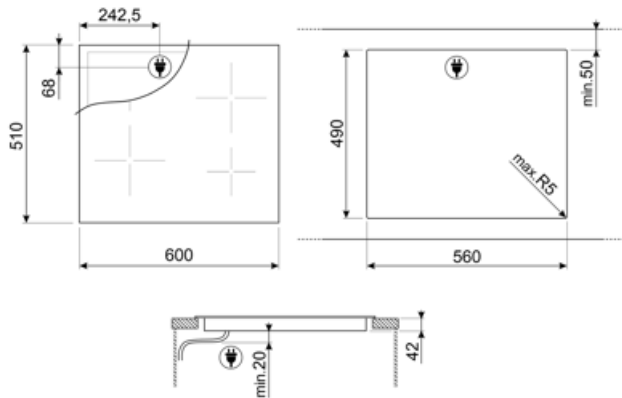

---

## Compatible Accessories

---











### SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs

---

## Symbols glossary

---

	Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.		Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.
	Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light.		Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.
	Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.		Time elapsed: shows how long the cooking zone has been in use.
	Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.		Touch control