

SE495ETD





Product Family Hob

Built-in type Ultra-low profile

Dimensions90 cmPower supplyElectricTypeCeramic

EAN code 8017709324254



Aesthetics



AestheticUniversaleColourBlackFinishingGlassMaterialGlassGlass typeCeramicGlass edgeStraight edgeType of control settingCompact Slider

LED coloursRedControl knob positionFrontSerigraphy colourGrey

Options













Worktop Cut-Out 490x850 mm

Keep warm automatic Yes

function

End cooking timer 5
Minute minder 1
End of cooking alarm Yes
Residual time indicator Yes

Limited Power Yes
Consumption Mode

Limited Power 2800, 4000 W

Consumption Mode in W
Showroom Demo Option Yes
Control Lock / Child Yes

Safety

Quick start Yes

Technical Features









Front-left - Ceramic - Double - Ø 18.5 cm Rear-left - Ceramic - Single - Ø 15.0 cm Central - Ceramic - Triple - - Ø 29.0 cm Rear-right - Ceramic - Single - Ø 20.0 cm Front-right - Ceramic - Single - Ø 15.0 cm

Automatic switch off when overheat

Yes

Yes


Automatic switch off

when overflow

Residual heat indicator Yes

Electrical Connection

Plug Electrical connection	Not present 9100 W	Type of electric cable installed	Yes, Single phase
rating (W)		Additional connection	Yes, Double and Three
Current	26 A	modalities	Phase
Voltage (V)	220-240 V	Frequency (Hz)	50/60 Hz
Voltage 2 (V)	380-415 V	Power supply cable length	150 cm
		Terminal box	6 poles

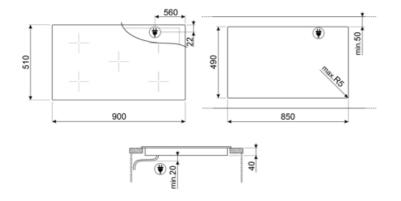



Not included accessories



SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs



Symbols glossary (TT)



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



Ultra-low profile: Installation of product with flat edge - height of 1 mm.



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



Compact Slider intuitive and easy to use



ECO-logic: option allows you to restrict the power limit of the appliance real energy saving.



This function allows you to keep cooked food warm without burner it



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light.



Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.



Quick Start function: the chosen temperature is reached faster. The heating element works at maximum power until the right temperature is reached.



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Time elapsed: shows how long the cooking zone has been in use.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.