

# SI2641DUK



<b>Product Family</b>	Hob
<b>Built-in type</b>	Ultra-low profile or Fully Flushed
<b>Dimensions</b>	60 cm
<b>Power supply</b>	Electric
<b>Type</b>	Induction
<b>EAN code</b>	8017709326975



## Aesthetics



<b>Aesthetic</b>	Universale
<b>Colour</b>	Black
<b>Finishing</b>	Glass
<b>Material</b>	Glass
<b>Glass type</b>	Ceramic
<b>Glass edge</b>	Straight edge
<b>Type of control setting</b>	Digi Touch
<b>LED colours</b>	Red
<b>Control knob position</b>	Front
<b>Logo</b>	Silk screen
<b>Serigraphy colour</b>	Grey

## Program / Functions



<b>No. of induction cook zones</b>	4
<b>No. of cooking zones with booster</b>	4
<b>Main on/off switch</b>	Yes
<b>Power levels</b>	9
<b>Total no. of cook zones</b>	4

## Options



Worktop Cut-Out	478-482x555-560 mm	Residual time indicator	Yes
End cooking timer	4	Control Lock / Child Safety	Yes
Minute minder	4	Rapid level selection	Yes
End of cooking alarm	Yes		

## Technical Features




Front-left - Induction - Single - 1.50 kW - Booster 2.00 kW - Ø 21.0 cm  
 Rear-left - Induction - Single - 1.20 kW - Booster 1.60 kW - Ø 15.0 cm  
 Rear-right - Induction - Single - 1.50 kW - Booster 2.00 kW - Ø 21.0 cm  
 Front-right - Induction - Single - 1.20 kW - Booster 1.60 kW - Ø 15.0 cm

Automatic setting according to pan dimension	Yes	Automatic switch off when overheat	Yes
pan detection	Yes	Residual heat indicator	Yes
Minimum pan diameter indication	Yes	Protection against accidental start up	Yes

## Electrical Connection

Electrical connection rating (W)	2800 W	Frequency (Hz)	50/60 Hz
Current	13 A	Power supply cable length	120 cm
Voltage (V)	220-240 V	Terminal box	6 poles
Type of electric cable installed	Yes, Single phase	Plug	UK 13 AMP

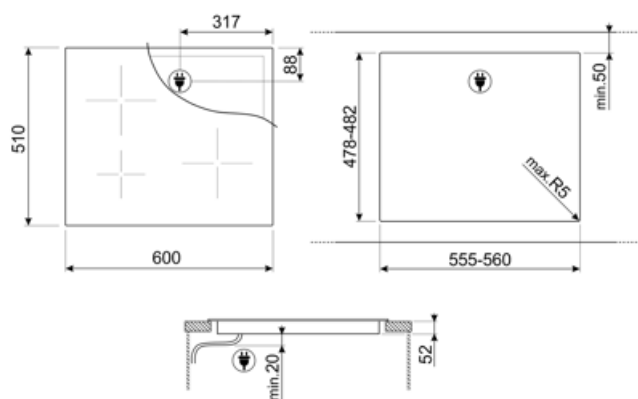

---

## Compatible Accessories











---



### SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs

## Symbols glossary

	Power booster: option allows the zone to work at full power when very intense cooking is necessary.		Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.
	CUT_OUT_STANDARD_72dpi		Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.
	Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.		Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).
	Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.		Time elapsed: shows how long the cooking zone has been in use.
	Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.		Touch control