SI2B22641D

Product Family	Hob
Built-in	Ultra-low profile or Fully Flushed
Dimensions	60 cm
Power supply	Electric
Type	Induction
EAN code	8017709357665

Aesthetics

Aesthetics	Musa
Colour	Black
Finishing	Glass
Material	Glass
Glass Type	Ceramic
Glass edge	Straight edge
Gas_replacement	Yes
Type of control setting	Digi Touch
Slider	Red
Control knobs position	Front
Logo	Silk screen
Serigraphy colour	Grey

Program / Functions

No. of induction cook zones	4
Time-setting options	Automatic switch-off
No. of cooking zones with booster	4
No. of Flexible zones	2
Main on/off switch	Yes
Power levels	9
Total no. of cook zones	4

Options

Flexible Zone Type	Bridge	**Residual time indicator**	Yes
Standard cut out	478-482x555-560 mm	**Limited Power Consumption Mode**	Yes
End cooking timer	4	**Control Lock / Child Safety**	Yes
Minute minder	1	**Bridge option**	Yes
End of cooking acoustic alarm	Yes		

Technical Features

Front left - Induction - single - 1.70 kW - Booster 2.10 kW - Ø 18.0 cm
Rear left - Induction - single - 1.70 kW - Booster 2.10 kW - Ø 18.0 cm
Rear right - Induction - single - 1.70 kW - Booster 2.10 kW - Ø 18.0 cm
Front right - Induction - single - 1.70 kW - Booster 2.10 kW - Ø 18.0 cm

Left Multizone dimension	38.5x18.0 cm	**Automatic pan detection**	Yes, min 9 cm
Right Multizone dimension	38.5x18.0 cm	**Minimum pan diameter indication**	Yes
Booster power left Multizone	3 kW	**Automatic switch off when overheat**	Yes
Booster power right Multizone	3 kW	**Residual heat indicator**	Yes
Automatic setting according to pan dimension	Yes	**Protection against accidental start up**	Yes

Electrical Connection

Nominal power (W)	7200 W	**Type of electric cable**	Yes, Double and Three Phase
Current	32 A	**Frequency (Hz)**	50/60 Hz
Voltage (V)	220-240 V	**Power supply cable length**	120 cm
Voltage 2 (V)	380-415 V	**Plug**	No
Type of electric cable	Single phase		

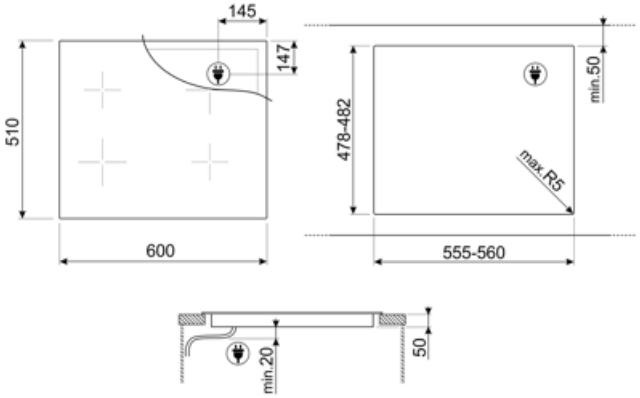
145
147
510
600
478-482
min.50
max.R5
555-560
min.20
50

Compatible Accessories

SCRP

Induction and ceramic hobs and teppanyaki scraper

Symbols glossary

Power booster: option allows the zone to work at full power when very intense cooking is necessary.

CUT_OUT_STANDARD_72dpi

Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.

Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.

Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.

Min diameter pot detection of 9 cm

Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.

ECO-logic: option allows you to restrict the power limit of the appliance real energy saving.

Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.

Time elapsed: shows how long the cooking zone has been in use.

TWIN_ZONE_72dpi

Touch control