

SI564DUK




Product Family

Built-in type Ultra-low profile or Fully Flushed

Hob

Dimensions 60 cm
Power supply Electric
Type Induction

EAN code 8017709257415



Aesthetics



Aesthetic Universale Colour Black **Finishing** Glass Material Glass Glass type Ceramic Glass edge Straight edge Type of control setting Digi Touch Control knob position Front Silk screen Logo Serigraphy colour Grey

Program / Functions



No. of induction cook zones 4
No. of cooking zones with booster 4
Main on/off switch Yes
Power levels 9
Total no. of cook zones 4

Options













Worktop Cut-Out

478-482x555-560 mm



End cooking timer 4 Limited Power Yes

Minute minder 4 Consumption Mode

End of cooking alarm Yes

Residual time indicator Yes

Limited Power 3000, 4500 W

Consumption Mode in W

Control Lock / Child Yes

Safety

Rapid level selection Yes

Technical Features





Front-left - Induction - Single - 1.40 kW - Booster 1.40 kW - Ø 18.0 cm

Rear-left - Induction - Single - 1.40 kW - Booster 1.40 kW - Ø 18.0 cm

Rear-right - Induction - Single - 1.40 kW - Booster 1.40 kW - Ø 18.0 cm

Front-right - Induction - Single - 1.40 kW - Booster 1.40 kW - Ø 18.0 cm

Automatic setting Yes Automatic switch off Yes

according to pan when overheat

dimension Residual heat indicator Yes pan detection Yes Protection against Yes

Minimum pan diameter Yes accidental start up

indication


Electrical Connection

Electrical connection 3000 W Frequency (Hz) 50/60 Hz rating (W) Power supply cable 120 cm

Current 13 A length

Voltage (V)220-240 VTerminal box6 polesType of electric cableYes, Single phasePlugUK

installed

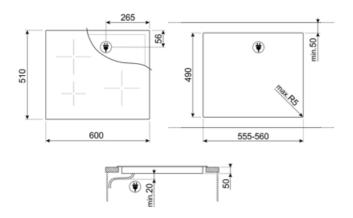



Compatible Accessories



SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs





Stainless steel grill plate to cook Teppanyaki dishes



Symbols glossary



Power booster: option allows the zone to work at full power when very intense cooking is necessary.



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.



Touch control



CUT_OUT_STANDARD_72dpi



ECO-logic: option allows you to restrict the power limit of the appliance real energy saving.



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Induction: The work of these hobs is based on the principle of electromagnetic induction. The heat is generated directly in the bottom of the pan during its contact with the hob.



Quick selection, with one touch cooking begins at the highest level, then automatically reduces after time. Ideal for dishes that require quick boiling and then continued cooking without constant control (eg beef broth).



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.



Time elapsed: shows how long the cooking zone has been in use.



Timer: All ceramic hobs have a timer which automatically ends cooking after a preset time.