SPD513

Tipo	Undercounter dishwashers
Louça	Louça; Copos; Talheres; GN1/1 trays
Dimensões do cesto	500x500 mm
Painel de comandos	Controlo eletrónico da temperatura
Standard drain pump with partial water renewal in the wash tank	Sim
Tipo de caldeira	Caldeira de pressão
Bomba de lavagem	Standard
Ligação energética	400 V 3N~ / 12 A / 7,3 kW / 50 Hz
Dimensões do produto (LxPxA)	600x600x822 mm



Mercado

Indústrias	Bares, Cafés e Pubs, Hotelaria, Restaurantes / Catering, Padarias / Pastelarias, Estabelecimentos de Cuidados, Supermercados / Comércio de alimentos, Catering, Indústrias Alimentares, Talhos

Design

Cor dos LEDs	Verde	**Design**	Easyline

Especificações técnicas

Trays number	7 x GN1/1
Opção de lavagem dos tabuleiros	Sim
Consumo de água por ciclo	3,2 l
Temperatura de lavagem (mín-máx)	60 °C
Temperatura de enxaguamento (mín.-máx.)	71 °C - 85 °C
Temperatura de enxaguamento a frio	No
Temperatura pré-definida de ligação da água	5°C
Consumo mínimo de água por ciclo	3,2 l
Temperatura máxima de entrada:	60°C
Dureza máxima da água	12°f - 7°dH
Pressão de entrada	250-1000 kPa (min-max)
Carga de detergente	1,5 l/h
Carga de enxaguamento	0,4 l/h
Altura de carga operável	400 mm
Profundidade com porta aberta	1020 mm

Programas

Programas	6 programas automáticos; 1 fully customizable program; Programas de autolimpeza
Opções do programa	Enxaguamento extra, Ciclo da água limpa
Tabela de programas	Easyline dishwasher, glasswasher and traywasher 500
Numero máximo de cestos/hora	60
Numero máximo de pratos/hora	1080
Numero máximo de copos/hora	2160

Ligação elétrica

Potência do elemento de aquecimento do tanque	2000 W
Potência do elemento de aquecimento da caldeira	6100 W
Potência da bomba de lavagem	700 W
Ligação pré-definida	7300 W
Ligação eléctrica opcional	230 V 3~ / 19 A / 7,3 kW / 50 Hz; 230 V 3~ / 19 A / 6,8 kW / 50 Hz ; 230 V~ / 15 A / 3,4 kW / 50 Hz ; 230 V~ / 17 A / 3.9 kW / 50 Hz; 230 V~ / 20 A / 4,5 kW / 50 Hz ; 230 V~ / 22 A / 5,0 kW / 50 Hz; 400 V 3N~ / 12 A / 6,8 kW / 50 Hz
Ficha elétrica	Não

Interface

Display	8 dígitos
Numero de botões	5
Luz indicadora On/Off	Sim
Alerta de falta de abrilhantador	Sim
Alerta de falta de detergente	Sim
Indicador da fase do programa	Sim
Indicador de fim do programa	Sim
Diagnóstico manual	Sim

ESPECIFICAÇÕES TÉCNICAS

Cuba	Profundo
Tipologia	Parede dupla
Material da cuba	Aço inox AISI 304
Painel traseiro	Porta galvanizada
Porta equilibrada	Sim
Sistema de lavagem superior	Um braço de lavagem e um braço de enxaguamento dividido, em aço inoxidável.
Sistema de lavagem inferior	One wash and one split rinse spray arms, stainless steel
Filtro da cuba	Aço inox
Junta da porta	Em 3 lados
Guias dos cestos	Embutidas
Filtro	Sistema de filtragem de 5 estágios
Capacidade da cuba	11 l
Capacidade da caldeira	6 l
Ruído	Lpa 54,5 dBA
Classe de Proteção	IPX4
Pés ajustáveis	Sim
Altura max. de drenagem	600 mm

Acessórios incluídos


Cesto para pratos	1x PB50D01
Cesto para talheres	1x PHOOS02
Cesto de fundo plano	1x PB50G02
Mangueira de abastecimento de água	Sim - 2m
Mangueira de drenagem	Sim - 2m

Equipamentos

Dispensador peristáltico de detergente	Controlo eletrónico
Dispensador peristáltico de abrilhantador	Controlo eletrónico
Sonda de nível químico	Sim, opcional KITSONLIV
Unidade de medida da dosagem de produtos químicos	gr/lt
Sistema Thermostop para caldeira de enxaguamento	Yes - default
Sistema Thermostop no tanque de lavagem	Sim
Sistema de arranque suave da bomba de lavagem	Sim
Sistema Stand-by	Sim
Opção para ativação automática diária	Sim, desligado por definição
Contador de ciclos	Sim
Diâmetro do tudo de abastecimento de água	DN15 - ½”
Ø do tubo de drenagem	DN20-G 3/4"
Comprimento da mangueira de detergente (vermelha)	2,2 m
Comprimento da mangueira de enxaguamento (azul)	2,2 m

Dados de logística

Código EAN	8017709341718
Dimensões do produto embalado (LxPxA)	660x700x990 mm
Peso líquido (kg)	55,000 kg
Peso bruto (kg)	63,000 kg

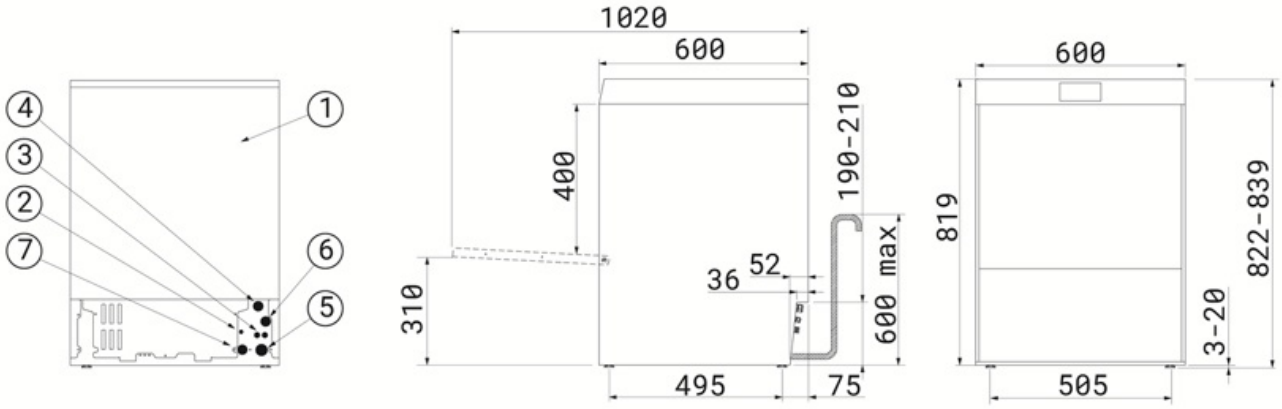

1	PANNELLO RETRO - LOWER BACK PANEL
2	MORSETTO EQUIPOTENZIALE - EARTH TERMINAL
3	TUBI POMPE PERISTALTICHE - PERISTALTIC HOSES
4	CAVO ALIMENTAZIONE ELETTRICA - ELECTRICITY SUPPLY CABLE
5	TUBO DI SCARICO - DRAIN HOSE
6	ENTRATA CAVO DI ALIMENTAZIONE DOSATORE ESTERNO - EXTERNAL DISPENSER POWER CABLE ENTRY POINT
7	TUBO DI CARICO - FILLER HOSE

Acessórios Compatíveis

KITDETKCC500




Kit for detergent (1l) and rinse aid (1l) storage for undercounter 500 double wall models

KITSONLIV




Probe level kit

PB50D01




Polypropylene basket for 18 plates Ø250 mm max, dim.(WxDxH) 500x500x105 mm

PB50G02



Universal flat bottom polypropylene basket, internal height 150 mm, dim. (WxDxH) 500x500x170 mm

PB50T01



Polypropylene basket for 8 trays GN 1/1 h 40 mm for traywasher and hood-type models. Vertical row spacing 68 mm and horizontal row spacing 54 mm, dim. (WxDxH) 500x500x105 mm

PHOOGR5



Tilted glass insert for basket PB50G02 500x500 mm, configurable with 4 units of 5 glasses each (first line Ø max 110 mm, lines 2-4 Ø max 95 mm), or 5 units of 5 glasses each (forst line Ø max 95 mm, lines 2-5 Ø max 75 mm)

PHOOS01



Polypropylene single basket for cutlery

PHOOS02



6 compartment polypropylene basket for cutlery

WB50G01



Universal wire basket with flat bottom, internal height 120 mm, dim. (WxDxH) 500x500x130 mm

WB50G02



Sloped bottom wire basket for 25 glasses Ø90 mm max, dim. (WxDxH) 500x500x170 mm

WB50G03



Sloped bottom wire basket for 20 glasses Ø95 mm max, dim. (WxDxH) 500x500x235 mm

WB50G04



Wire basket with sloped bottom for 12 glasses Ø110 mm max or 9 glasses Ø135 mm max, dim. (WxDxH) 500x500x165 mm

WB50PG5



Wire basket with flat bottom for 25 plastic glasses, max. H 230 mm, min.-max. Ø 36-95 mm, dim. (WxDxH) 500x500x260 mm

WB50T02



Wire basket for 7 trays GN1/1 h 20 mm, dim. (WxD) 500x500 mm

WH00S01



Wire insert for 17 small dishes, width 100 mm, for flat bottom baskets 500x500 and 600x500 mm

WS5



Estrutura inferior para máquina de lavar copos e máquina de lavar louça 500

Benefit (TT)

Balanced door

Effortless opening and closing

The counterbalanced door is designed to ensure smooth and effortless opening and closing, providing high user convenience. Additionally, it can be locked in a halfway position, a particularly useful feature for promoting natural drying at the end of the workday, enhancing overall hygiene and preventing the buildup of residual moisture.

5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

Integral double-skin

Thermal and acoustic insulation guaranteed

The double-skin design of undercounter dishwashers is engineered to optimise energy efficiency by minimising heat loss and accelerating water heating, resulting in lower energy consumption and faster start-up times. Additionally, it provides effective sound insulation, helping to reduce noise levels and ensuring a quieter, more comfortable working environment for staff.

Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.