

SPG425S

Product Family	Dishwasher
Subfamily	Undercounter
Type	Undercounter glasswashers
Crockery	Crockery; Glasses; Cutlery
Basket dimensions	400x400 mm
Control Panel	Touch screen
Rinse pump	Self-Adaptive HTR+
Wash pump	Standard
Default power supply	400 V 3N~ / 15 A / 6,6 kW / 50 Hz
Dimensions	460x600x705 mm



Target

Industries	Bar / Cafeterias / Bistros / Wine bars / Pubs; Hotels; Ristoranti / Catering; Bakeries / Pastry shops; Commercial food services
------------	---

Aesthetics

Led colour	White	Series	Pura
------------	-------	--------	------

Technical Features

Water consumption per cycle	2 l	Water inlet pressure	100-1000 kPa
Wash temperature (min-max)	60 °C - 70 °C	Detergent flow rate	1.5 l/h
Rinse temperature (min-max)	65 °C - 85 °C	Rinse aid flow rate	0.4 l/h
Cold rinse temperature	24 °C	Usable load height	315 mm
Warm water connection	8°C	Depth with door open	930 mm
Minimum water consumption per cycle	1,8 l	Maximum plate diameter	300 mm
Max. inlet temperature	60°C	Maximum glass height	300 mm
Max water hardness	60°f - 34°dH		

Programmes

Programs	10 customizable programs; Self-cleaning programs
Program options	Extra rinse; Clean water cycle
Program table	Pura undercounter 400
Program visibility	Yes
Maximum baskets/hour	60
Maximum plates/hour	480
Maximum glasses/hour	1500

Connectivity

SmegConnect	Yes	PST certificate support period [UK]	24 months
Connectivity	Wi-Fi	UK PSTI support period end date	2027-12-31

Electrical Connection

Tank heating element power	2000 W	Default connection	6600 W
Boiler heating element power	4300 W	Electrical connection options	230 V 3~ / 20 A / 6,6 kW / 50 Hz; 230 V~ / 11 A / 2,45 kW / 50 Hz; 230 V~ / 14 A / 3,2 kW / 50 Hz; 230 V~ / 29 A / 6,6 kW / 50 Hz
Wash pump power	300 W	Plug	No

Interface

Display	TFT	Low detergent alert	Yes
Number of buttons	5	Cycle progress indicator	Yes
On/off indicator	Yes	End of cycle indicator	Yes
Salt light indicator	Yes	Manual diagnostics	Yes
Low rinse aid alert	Yes		

Construction

Tank Construction	Deep drawn Double wall	Filter	5-stages filter system
Tank material	Stainless steel AISI 304	Filter presence sensor	Yes
Back panel	Stainless steel	Wash tank capacity	7 l
Counter balanced door	Yes	Boiler capacity	4 l
Upper washing system	One washing and one split rinse spray arms, stainless steel	Boiler type	Atmospheric boiler
Lower washing system	One washing and one split rinse spray arms, stainless steel	Noise level	Lpa 55 dBA
Tank filter	Stainless steel	USB port	Yes
Door gasket	On 3 sides	Protection class	IPX4
Rack guides	Embossed	Adjustable feet	Yes
		Drain max. height	600 mm

Accessories Included


Glass basket	WB40G02	Water supply pipe	Yes - 1.5m
Cutlery basket	PHOOS01	Drain pipe	Yes - 2m
Flat basket	WB40G01		

Equipment

Drain pump	Yes	Stand-by system	Yes
Peristaltic detergent dispenser	Yes, electronic control	Option for auto daily switch on	Yes
Peristaltic rinse-aid dispenser	Yes, electronic control	Break tank	Yes
Chemical level probe	Yes, optional KITSONLIV	Partial water exchange in the wash tank via built-in drain pump	Yes
Integral continuous water softener	Yes	Water supply pipe diameter	DN10 - 3/8"
Rinse boiler Thermostop system	Yes - default	Drain supply pipe diameter	21.5 mm
Wash tank Thermostop system	Yes	Detergent (red) hose length	Yes, manual
Wash pump soft start system	Yes	Rinse aid (blue) hose length	Yes, manual

Logistic Information

EAN code	8017709351960	Net weight (kg)	49.000 kg
Packed product dimensions (WxDxH)	720x515x710 mm	Gross weight (kg)	55.000 kg

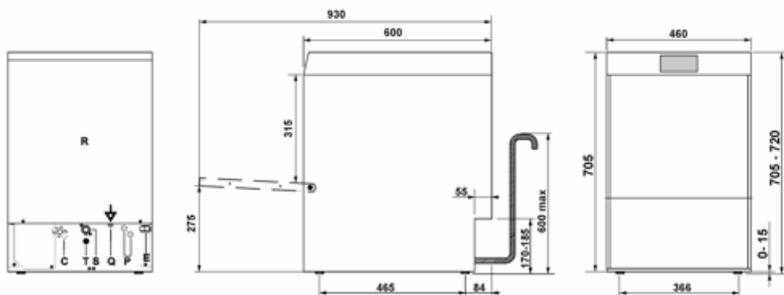

R	PANNELLO RETRO LOWER BACK PANEL
Q	MORSETTO EQUIPOTENZIALE EARTH TERMINAL
P	TUBI POMPE PERISTALTICHE PERISTALTIC HOSES
E	CAVO ALIMENTAZIONE ELETTRICA ELECTRICITY SUPPLY CABLE
S	TUBO DI SCARICO DRAIN HOSE
T	ENTRATA CAVO DI ALIMENTAZIONE DOSATORE ESTERNO EXTERNAL DISPENSER POWER CABLE ENTRY POINT
C	TUBO DI CARICO FILLER HOSE

Compatible Accessories



KITDETKCC400

Kit for detergent (1l) and rinse storage (1l) for dishwashers 400x400



KITSONLIV

Probe level kit



PB40C02

Universal flat bottom polypropylene double basket, 400x400x125 mm



PHOGR4

Glass basket for 400x400 glasswashers



PHOOS01

Single basket in polypropylene for cutlery

RB40A3

Adapter for round basket



RB40G01

Universal wire basket with flat base 400

WB40D01

Wire basket for 8 dishes 400x400



WB40G01

Universal wire basket with flat bottom 400x400

WB40G02

Wire basket for 8 glasses, max diameter 90mm, inclined bottom 400x400



WB40G03

Wire basket for 8 glasses, inclined bottom, 4-row 400x400

WB40PG4

Wire basket for 16 plastic glasses, max. H 180 mm, min.-max. Ø 36-95 mm, dim. (WxDxH) 400x400x210 mm



WH00S01

Wire insert for 12 small dishes

WS4

Underframe for glasswasher 400mm



Benefit

Balanced door

Effortless opening and closing

Effortless opening and closing

The counterbalanced door is designed to ensure smooth and effortless opening and closing, providing high user convenience. Additionally, it can be locked in a halfway position, a particularly useful feature for promoting natural drying at the end of the workday, enhancing overall hygiene and preventing the buildup of residual moisture.

5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

The presence sensor filter alerts if the filtration system is out of position, ensuring safe washes every time.

HTR+ System

Self-adaptive rinsing system for intelligent water management

The self-Adaptive HTR+ System monitors and adjusts the rinse volume with each wash cycle. The intelligent rinse management ensures the perfect amount of water and heat on the dishes, delivering consistent, reliable results, cycle after cycle.

Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

Integrated softener

Effective water treatment for consistently sparkling glasses

The integrated continuous regeneration water softener ensures effective water treatment, enhancing washing performance and preserving the machine's operational lifespan. The resin regeneration process takes place during the wash cycle without interruptions, providing constant control over water hardness. This system prevents limescale buildup, maximises detergent efficiency, and guarantees spotless results on glassware and dishes.

Integral double skin

Thermal and acoustic insulation guaranteed

The double wall is designed to optimise energy efficiency by reducing heat loss and accelerating water heating, resulting in lower energy consumption and faster cycle start-up times. Additionally, it provides effective acoustic insulation, helping to reduce noise and ensuring a quieter, more comfortable working environment for the staff.

Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

MyPersonal Wash

10 pre-set washing programmes for a complete and ready-to-use solution.

Each model in the PURA range offers 10 tested programmes, ensuring ready-to-use solutions for any washing requirement. With the MyPersonal Wash function, parameters such as time, temperature, pressure, and washing options can be customised, optimising cycles for delicate dishes or stubborn dirt. The result is a tailored wash, always flawless.

Program visibility

Program selection displayed for simplified dishwasher management

Users can select the programs to be displayed, hiding those that are unnecessary or unused. This feature not only helps prevent improper use of the appliance but also represents a significant step towards fully customising the user experience.