

SPO5L2SL



Family	Professional ovens
Subfamily	Combi steam oven 5 trays GN1/1
Power supply	Electric
Oven type	Galileo Professional combi steam oven
Power supply	400 V 3N~ / 17 A / 8 kW / 50-60 Hz
Adjustable feet	Yes
Product dimensions (WxDxH)	790x833x645 mm
Maximum depth with open door	1567 mm



Target

Industries	Hotels; Restaurants; Bakeries / Pastry shops; Food Industries; Care facilities ; Food retail; Catering and Institutions
-------------------	--

Aesthetics

Door with stainless steel stripes	Yes	Digit display color	Multicolor
Colour	Stainless steel/Black	Front panel	Glass/Stainless steel
Display type	TFT digital, 7 inches touch		

Controls

Storable programs number	512	Hold function	Adjustable
Preset recipes	>100	Forced cooling	Yes
Timer setting range	0-23:59' (min. - max.)	Chimney regulation	Automatic
Cooking steps	8 + preriscaldamento + mantenimento	Wash programs	Short/medium/long/grill/rinse
Delayed start	Yes; No	HACCP data	Yes
Pre-heating	Yes	Self diagnostic	Yes

Options

Combinable hood	K510X
------------------------	-------

Accessories included




Probe	4 points external core probe
-------	------------------------------

Electrical Connection

Plug	Not present
------	-------------


Construction

Oven materials	Stainless steel / glass / plastics	Exhaust position	Back
Cavity dimensions (WxDxH)	670x560x420 mm	Components cooling system	Yes
Cavity material	Stainless steel	Timer type	Electrical
Shelves number	5	Temperature range	30-270°C
Tray frame support	Stainless steel AISI 304	End cooking signal	Yes
Adapter kit for trays 600x400 mm	Yes	Safety switch with open door	Yes
Shelves distance	70 mm GN1/1 - 90 mm EN 600x400	Manual reset safety thermostat	Yes
Door construction	Triple glass	Removable deflector	Yes
Door opening	Lateral - left hinge	Detergent type	Liquid
Handle type	Rotating	Light switch with open door	Yes
Glass	Openable with hinge	Lighting	1 LED lamp
Fan motor power	200 W	Light power	3.6 W
Engine rpm	Progressive %	USB port	Yes
Motor rpm in standard speed	2850 rpm	Water load pipe	Yes
Motor rpm in low speed	1425 rpm	Water entries number	1
Water injection on each fan	Yes	External detergent containers system	Yes
Humidification levels	Automatic / Percentage progressive	Water inlet pressure	200-1000 kPa (min-max)
Steam control	5-100% (min-max)	Power cable length	170 cm
Open boiler	Yes	Back panel	Galvanized
Drain diameter	1" 1/2 - DN 40 mm	IPX protection	IPX4

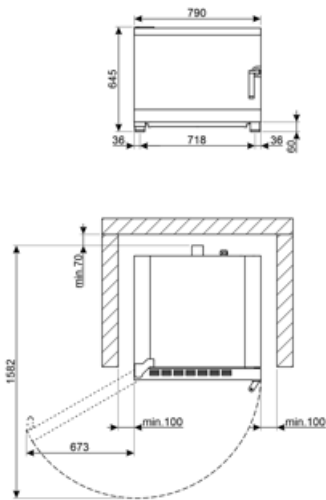

- | | |
|---|--|
| 1 | ALIMENTAZIONE ELETTRICA - POWER SUPPLY |
| 2 | MORSETTO EQUIPOTENZIALE - EARTH TERMINAL |
| 3 | TUBO DI CARICO - FILLER HOSE |
| 4 | BYPASS DECALCIFICATORE - BYPASS DESCALER |
| 5 | TUBO DI SCARICO - DRAIN HOSE |
| 6 | USCITA FUMI CALDI - HOT EXHAUST OUTLET |
| 7 | TARGHETTA CARATTERISTICHE TECNICHE - TECHNICAL SPECIFICATION LABEL |

Compatible Accessories



3743

Kit of 4 flat aluminum trays EN 600×400 mm




3751

Flat perforated aluminium tray (4pcs)



3805

Kit of 4 chrome-plated wire grids EN 600×400 mm



3810

Kit of 4 wave wire grids for baguettes EN 600×400 mm




CLB45LSE

Flow meter for filter FB45LSE1100




FB45LSE1100

Water treatment filter for Galileo Professional oven; 7.907 litres capacity with 10 Kh hardness and bypass set 1



G11T

Non-stick GN1/1 tray



G11X8P

8 vertical GN1/1 chicken grid

KITDPEC

Galileo professional external detergent lance kit



KITSTCK55

Conjunction kit between 2 stacked Galileo ovens (SPO4 or SPO5)



R4EN6040

Galileo Professional oven tray support kit for 4 EN 600×400 mm trays




T11TH20

GN1/1 non-stick tray, 20 mm height




TB45LSE

Water treatment filter head for Galileo Professional ovens



TF11XH2












GN 1/1 perforated aluminium tray, 20 mm height



TMF11TH2

GN 1/1 non-sticking microperforated tray, 20 mm height

Symbols glossary

	Electric		Humidity and heat controlled proving
	Fan speed adjustable between 50 and 100% of the speed		Core probe baking by temperature difference (Δt)
	Fan forced heating		Automatic washing
	Dry heat for a perfect grill		Steam generated by injecting water into the fan and evaporation on the heating element
	Saturated steam created by boiling in the cavity		Steam and hot air combined cooking
	Low cooking sous-vide		

Benefit (TT)

Hinged opening

Easily accessible glass for effortless maintenance and cleaning

The glass panels are designed to be easily accessible and inspectable, ensuring great convenience during cleaning and maintenance operations. This feature significantly simplifies the process, making it quick and efficient, while ensuring that every intervention can be carried out with maximum comfort and complete safety.

WashArt System

Efficient washing, optimised consumption, and minimal space usage

The WashArt washing system, equipped with a rotating nozzle, ensures even distribution of water and detergent within the cavity, providing deep cleaning and quick drying. To meet every need, four washing programmes are available: Short, Medium, Long, and Grill, along with a dedicated rinse programme. Thanks to its advanced technology, WashArt optimises efficiency and reduces consumption, while the rotating nozzle, with its compact design, minimises space usage in the cooking chamber.

Fan speed

Precise fan speed modulation for consistently even cooking results

In the Galileo Professional ovens, the fan speed can be adjusted from a minimum of 50% to a maximum of 100%, in 5% increments. This feature allows for precise customisation of the airflow, perfectly adapting it to the specific needs of each preparation. Thanks to this versatility, it is possible to achieve flawless cooking results, ensuring even and accurate heat distribution. Moreover, precisely adjusting the fan speed helps preserve the delicacy of sensitive foods, preventing exposure to excessive heat and creating the ideal conditions to maintain their lightness and internal structure.

Core probe

Multipoint cooking sensor for precise and uniform results

Optimal precision and control thanks to the four temperature measurement points, ensuring an accurate reading at every stage of cooking. The advanced sensor precisely detects the heat at the core of the food, guaranteeing the ideal cooking level for consistently perfect and uniform results.

SteamArt Technology

Open Boiler system to generate steam directly within the cavity, in quick times and at very low temperatures

Thanks to the innovative Open Boiler system, steam is generated directly within the cavity, in very short times and at very low temperatures (starting from 30°C, ideal for supporting the proofing phase). This system is particularly suited for delicate cooking processes that require the use of 100% steam, ensuring even and gentle cooking that preserves the nutritional properties, taste, and texture of the food.

8 cooking stages

Flexibility and precision in every cooking stage

The ability to set multiple cooking phases, in addition to preheating and keeping warm, gives the combi-steam oven exceptional versatility, responding precisely to the diverse needs of every preparation. Each phase of the cooking process can be customised with great accuracy, optimising results whether it's slow cooking at low temperatures or achieving a perfect final browning. Thanks to the advanced control of steam and heat parameters, it is possible to achieve even cooking on every surface, significantly enhancing the quality of the finished product and ensuring flawless results.

System for external detergent tanks

Efficient cleaning operations and optimal resource management

Some oven models are designed to use an external detergent tank and are equipped with dedicated suction hoses. This solution provides greater autonomy, reducing the need for frequent refills, and significantly simplifies the detergent replenishment process. As a result, cleaning operations become more efficient and continuous, without interruptions, ensuring optimal resource management and high hygiene performance.