

# SPO8L2SDL



<b>Família</b>	Fornos
<b>Subfamily</b>	Combi steam oven 8 trays 600x400
<b>Power supply</b>	Elétrico
<b>Oven type</b>	Forno Galileo profissional
<b>Capacidade de tabuleiro</b>	4 trays EN 600x400 mm
<b>Fonte de energia</b>	400 V 3N~ / 28A / 14,5 kW / 50-60Hz
<b>Sistema do vapor</b>	Direct and Open boiler
<b>Pés reguláveis em altura</b>	Sim
<b>Product dimensions (WxDxH)</b>	790x840x1145 mm
<b>Profundidade máxima com a porta aberta</b>	1581 mm



## Mercado

<b>Industries</b>	Hotelaria; Restaurants; Butcher shops / Delicatessens; Care facilities ; Commercial food services; Grocery shops / Food retail
-------------------	---

## Design

<b>Porta com tiras em aço inox</b>	Sim	<b>Cor dos dígitos no display</b>	Multicor
<b>Cor</b>	Aço Inox/Preto	<b>Painel frontal</b>	Vidro/Aço Inox
<b>Display</b>	TFT digital, 7" touch	<b>Design</b>	Galileo Professional

## Comandos

<b>Nº de programas em memória</b>	512	<b>Função de pausa</b>	Ajustável
<b>Receitas</b>	Sim	<b>Programas</b>	Sim
<b>Temporizador</b>	de 1 min até 23h59 min por passo	<b>Regulação da chaminé</b>	Automático
<b>Cozinha Multipasso</b>	Sim	<b>Programas de lavagem</b>	Sim
<b>Início diferido</b>	Sim; Não	<b>HACCP data</b>	Sim
<b>Pré-aquecimento</b>	Sim	<b>Auto diagnóstico</b>	Sim

## Opções

Exaustor compatível K510X

## Acessórios incluídos


Sonda térmica	Sonda térmica de 4 pontos externos	Manual shower	Sim
---------------	------------------------------------	---------------	-----

## ESPECIFICAÇÕES TÉCNICAS


Material do forno	Aço Inox / Vidro / Plástico	Posição de exaustão	Traseira
Dimensões da cavidade (LxPxAl)	670x560x860 mm	Sistema de arrefecimento	Sim
Material da cavidade	Aço inox	Tipo de temporizador	Elétrico
Níveis de tabuleiros	8	Temperaturas	30-270°C
Suporte dos tabuleiros	Aço Inox AISI 304	Aviso de final de cozedura	Sim
Kit de adaptação para tabuleiros 600x400 mm	Sim	Interruptor de segurança com porta aberta	Sim
Distância entre tabuleiros	90 mm	Reset de segurança do termostato	Sim
Material da porta	Vidro triplo	Deflector removível	Sim
Abertura da porta	Lateral	Tipo de detergente	Líquido
Tipo de puxador	Rotativo	Iluminação	2 lâmpadas LED
Vidro	Abre com dobradiça	Potência das lâmpadas	2x14W
Tipologia da ventoinha	2 ventole con inversione rotazione	Porta USB	Sim
Ventilação intermitente	Sim	Sistema de arrefecimento	Sim
Potência da ventoinha	2x200 W	Tubo de carga de água	Sim
RPM da ventoinha	Progressão %	Nº de entradas de água	1
RPM standard da ventoinha	2850 rpm	Depósito de detergente exterior	Sim
RPM da ventoinha na velocidade inferior	1425 rpm	Water inlet pressure	200-1000 kPa (min-max)
Injeção de água em cada ventoinha	Sim	Comprimento do cabo de alimentação	170 cm
Steam control	5-100% (min-max)	Painel traseiro	Porta galvanizada
Caldeira aberta	Sim	Proteção IPX	IPX4
Ø de drenagem	1" 1/2 - DN 40 mm		

## Dados de logística

Packed product dimensions (WxDxH)	1300x960x960 mm	Peso bruto (kg)	160.000 kg
Peso líquido (kg)	140.000 kg	EAN code	8017709356361

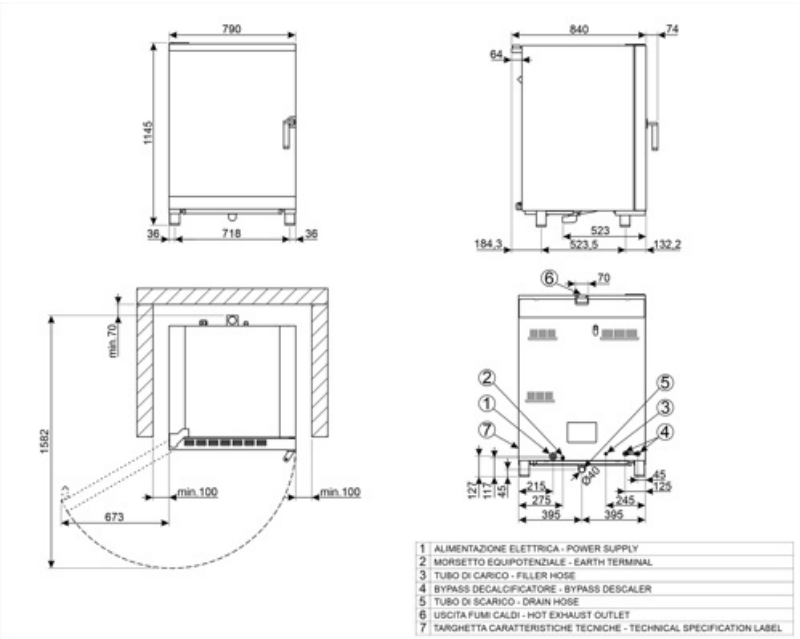

## Acessórios Compatíveis



**3743**




**3751**

Flat perforated aluminium tray (4pcs)



**3805**

Kit of 4 chrome-plated wire grids EN 600x400 mm



**3810**



**CLB45LSE**

Flow meter for filter FB45LSE1100




**FB45LSE1100**

Water treatment filter for Galileo Professional oven; 7.907 litres capacity with 10 Kh hardness and bypass set 1




**FB45LSE500**

Water treatment filter for Galileo Professional oven; 4.675 litres capacity with 10 Kh hardness and bypass set 1



**G11T**

Non-stick GN1/1 tray



**G11X8P**

8 vertical GN1/1 chicken grid



**KCAM10**

Chimney for Galileo Professional 8 and 10 trays



**R10GN**

GN1/1 trays guide kit for 8 trays Galileo Professional



**RUTVL**

Set of 4 wheels, fits all professional oven tables



**T11TH20**

GN1/1 non-stick tray, 20 mm height



**T11TH40**

GN1/1 non-stick tray, 40 mm height



**T11XH20**

Aluminium GN1/1 tray, 20 mm height



**T11XH65**

GN1/1 aluminium tray, 65 mm height




**T8S11T**

8 holes GN 1/1 non-sticking tray




**TB45LSE**



**TF11XH2**












GN 1/1 perforated aluminium tray, 20 mm height



**TMF11TH2**

GN 1/1 non-sticking microperforated tray, 20 mm height

## Symbols glossary

	Elétrico: a fonte de energia do forno é a eletricidade.		Fan speed adjustable between 50 and 100% of the speed
	Fan forced heating		Core probe baking by temperature difference ( $\Delta t$ )
	Automatic washing		Barbecue: aquecimento seco para grelhados perfeitos.
	Steam generated by injectiong water into the fan and evaporation on the heating element		Saturated steam created by boiling in the cavity
	Steam and hot air combined cooking		Sous-vide baixa temperatura
	Humidity and heat controlled proving		

---

## Benefit (TT)

---

### Hinged opening

Easily accessible glass for effortless maintenance and cleaning

The glass panels are designed to be easily accessible and inspectable, ensuring great convenience during cleaning and maintenance operations. This feature significantly simplifies the process, making it quick and efficient, while ensuring that every intervention can be carried out with maximum comfort and complete safety.

### WashArt System

Efficient washing, optimised consumption, and minimal space usage

The WashArt washing system, equipped with a rotating nozzle, ensures even distribution of water and detergent within the cavity, providing deep cleaning and quick drying. To meet every need, four washing programmes are available: Short, Medium, Long, and Grill, along with a dedicated rinse programme. Thanks to its advanced technology, WashArt optimises efficiency and reduces consumption, while the rotating nozzle, with its compact design, minimises space usage in the cooking chamber.

### Fan speed

Precise fan speed modulation for consistently even cooking results

In the Galileo Professional ovens, the fan speed can be adjusted from a minimum of 50% to a maximum of 100%, in 5% increments. This feature allows for precise customisation of the airflow, perfectly adapting it to the specific needs of each preparation. Thanks to this versatility, it is possible to achieve flawless cooking results, ensuring even and accurate heat distribution. Moreover, precisely adjusting the fan speed helps preserve the delicacy of sensitive foods, preventing exposure to excessive heat and creating the ideal conditions to maintain their lightness and internal structure.

### Core probe

Multipoint cooking sensor for precise and uniform results

Optimal precision and control thanks to the four temperature measurement points, ensuring an accurate reading at every stage of cooking. The advanced sensor precisely detects the heat at the core of the food, guaranteeing the ideal cooking level for consistently perfect and uniform results.

### SteamArt Technology

Open Boiler system to generate steam directly within the cavity, in quick times and at very low temperatures

Thanks to the innovative Open Boiler system, steam is generated directly within the cavity, in very short times and at very low temperatures (starting from 30°C, ideal for supporting the proofing phase). This system is particularly suited for delicate cooking processes that require the use of 100% steam, ensuring even and gentle cooking that preserves the nutritional properties, taste, and texture of the food.

## **8 cooking stages**

Flexibility and precision in every cooking stage

The ability to set multiple cooking phases, in addition to preheating and keeping warm, gives the combi-steam oven exceptional versatility, responding precisely to the diverse needs of every preparation. Each phase of the cooking process can be customised with great accuracy, optimising results whether it's slow cooking at low temperatures or achieving a perfect final browning. Thanks to the advanced control of steam and heat parameters, it is possible to achieve even cooking on every surface, significantly enhancing the quality of the finished product and ensuring flawless results.

## **Waste water cooling**

The temperatures are significantly lowered and the thermal impact reduced thanks to the waste water cooling system

Some ovens are equipped with a waste water cooling system that significantly lowers the temperature of the water before it is released, minimising the thermal impact. This mechanism optimises energy efficiency, enhances operational safety, and supports eco-friendly practices, helping to make the oven more sustainable and high-performing.

## **System for external detergent tanks**

Efficient cleaning operations and optimal resource management

Some oven models are designed to use an external detergent tank and are equipped with dedicated suction hoses. This solution provides greater autonomy, reducing the need for frequent refills, and significantly simplifies the detergent replenishment process. As a result, cleaning operations become more efficient and continuous, without interruptions, ensuring optimal resource management and high hygiene performance.