

SWT262T

Family	Dishwasher
Subfamily	Fresh Water System Dishwasher
Basket dimensions	500x500 mm
Panel	Fresh Water System Dishwasher
Filter	5-stages filter system
Rinse pump H.T.R. system	Yes
SHR system	Yes
Usable load height	540 mm
Power connection	400 V 3N~ / 16 A / 6,7 kW / 50 Hz
Depth with open door	1200 mm
Max dish diameter upper basket	240 mm
Max dish height lowe basket	290 mm
Product dimensions WxDxH	600x600x850 mm



Aesthetics

Control panel	SWT	Led color	Orange
---------------	-----	-----------	--------

Programs

SWT programs	5- 93°C - 40'; 6- 93°C - 53'; 7- 5' prewash; 8- 85°C - 21'; 9- 85°C - 31'; 10- 85°C - 23'; 11- 85°C - 34'
Drain and self cleaning cycle	Yes
Maximum basket/hour	72
Maximum dishes/hour	1296

Interface

Display	4 digit	Detergent missing alert	Yes
On/Off button	Yes	Cycle progress alert	Yes
Salt alert	Yes	End-cycle alert	Yes
Rinse aid missing alert	Yes	Manual diagnostic	Yes

Construction

Tank	Deep drawn	Rinse spray arm	Plastic
Tank material	Stainless steel AISI 304	Door gasket	On 3 sides
Back panel	Galvanized	Rack guides	Embossed
Door	Double wall	Net weight	74,000 kg
Tank filter	Stainless steel	Drain max. height	1000 mm
Washing spray arm	Plastic		

Technical Features

Tank heating element	6300 W	Water inlet	Cold 15°C
Washing pump	400 W	Max temperature inlet water	60°C
Default connection	6700 W	Max water hardness	12°f - 7°dH

Electrical Connection

Electrical connection option	230 V 3~ / 19 A / 6,7 kW / 50 Hz; 230 V~ / 16 A / 3,5 kW / 50 Hz
------------------------------	---

Equipments




Chemicals level probe	Yes, optional KITSONLIV	Automatic opening door	Yes
Automatic incorporated softener	Yes	Door lock	Yes
Boiler thermostop	Yes default ON	Double basket	Yes
Break tank	Yes		

Accessories Included

Water supply pipe Yes - 2m

Drain pipe

Yes - 2m

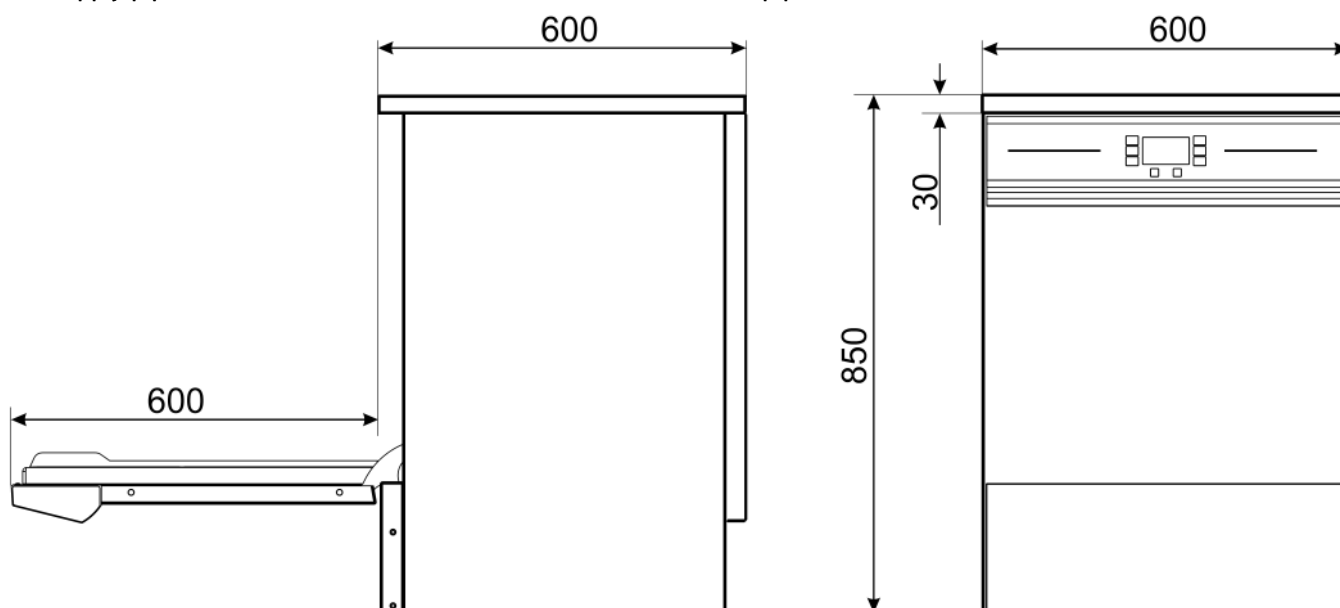

Symbols glossary (TT)



Child lock: some models are fitted with a device to lock the programme/cycle so it cannot be accidentally changed.