

UG405DMAUS

Family	Dishwasher
Subfamily	Undercounter Glasswasher
Basket dimensions	400x400 mm
Panel	Ecoline 2016
Filter	4-stages filter system
Rinse pump H.T.R. system	Rinse pump with atmospheric boiler
Usable load height	330 mm
Power connection	230 V~ / 13 A / 3,0 kW / 50 Hz
Depth with open door	882 mm
Product dimensions WxDxH	440x530x840 mm



Distribution

Solutions	Bars/Cafes
-----------	------------

Aesthetics

Serie	Ecoline	Control panel	Electronic
-------	---------	---------------	------------

Functions



Functionality	5-stage filter; HTR; Door clearance 330mm
---------------	---

Programs

Programs	3 automatic programs; Self-cleaning programs
Program options	Extra rinse; Clean water cycle
Program specifications	Boiler 85°C/Tank 60°C-1'30"; Boiler 85°C/Tank 60°C-2'30"; Boiler 85°C/Tank 60°C-4'
Drain and self cleaning cycle	Yes
Maximum basket/hour	40

Interface

Number of buttons	5	Manual diagnostic	Yes
-------------------	---	-------------------	-----

On/Off button Yes

Construction

Tank Construction	With printed base Single wall	Door gasket	Only up
Tank material	Stainless steel AISI 304	Rack guides	Embossed
Back panel	Galvanized	Tank capacity	8 l
Door	Double wall	Boiler capacity	4 l
Tank filter	Plastic	Protection class	IPX4
Washing spray arm	Stainless steel	Adjustable feet	Yes
Rinse spray arm	Plastic	Net weight	38,000 kg
		Drain max. height	600 mm

Technical Features

Tank heating element	2000 W	Water inlet	8°C
Boiler heating element	2700 W	Max temperature inlet water	60°C
Washing pump	290 W	Max water hardness	12°F - 7°dH
Default connection	3000 W	Water inlet	Cold 15°C
Water cycle consumption	2,3 l		

Electrical Connection

Plug Australia 15 AMP

Equipments


Drain pump	Yes	Rinse load	Yes, manual
Peristaltic detergent doser	Yes, electronic control	Cycle counter	Yes
Peristaltic rinse-aid doser	Yes, electronic control	Break tank	Yes
Default chemicals dosing unit of measure	gr/lit	Partial renewal of water in the tank and built-in drain pump	Si
Boiler thermostop	Yes default ON	Water supply pipe diameter	16 mm
Soft Start	Yes	Drain supply pipe diameter	21,5 mm
Automatic start	Yes, default OFF	Peristaltic detergent doser	Yes, manual
Detergent load	Yes, manual	Peristaltic detergent doser	Yes, manual

Accessories Included

Cutlery basket	PHOOS01	Drain pipe	Yes - 2m
Flat basket	PB40G01, WB40G01		
Water supply pipe	In acciaio Watermark		

Other basket and
accessory

1x RB40A4

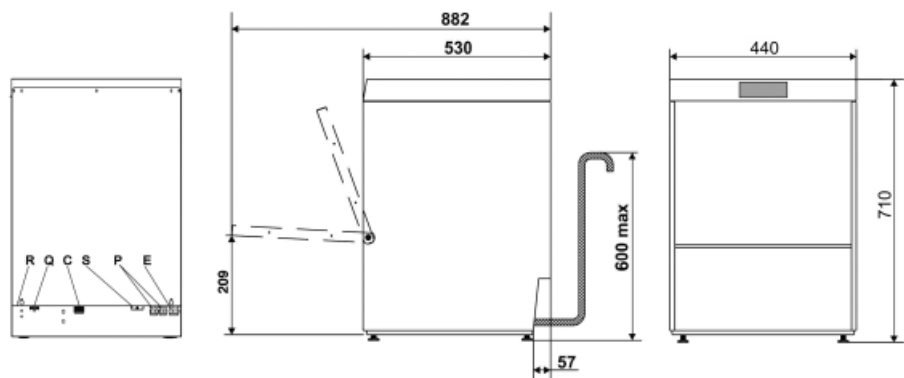

Q	MORSETTO EQUIPOTENZIALE EARTH TERMINAL
E	CAVO ALIMENTAZIONE ELETTRICA ELECTRICITY SUPPLY CABLE
C	TUBO DI CARICO FILLER HOSE
P	TUBI POMPE PERISTALTICHE PERISTALTIC HOSES
T	ENTRATA CAVO DI ALIMENTAZIONE DOSATORE ESTERNO EXTERNAL DISPENSER POWER CABLE ENTRY POINT
S	TUBO DI SCARICO DRAIN HOSE
R	PANNELLO RETRO LOWER BACK PANEL


Not included accessories

**RB40G01**

Universal wire basket with flat base 400

**WH00S01**

Wire insert for 12 small dishes

**WB40G01**

Universal wire basket with flat bottom 400x400

KITRB40G01

Adapter for round basket

WB40G03

Wire basket for 8 glasses, inclined bottom, 4-row 400x400

WB40D01

Wire basket for 8 dishes 400x400

**RB40A3**

Adapter for round basket

**PHOOS01**

Single basket in polypropylene for cutlery

**WB40G02**

Wire basket for 8 glasses, max diameter 90mm, inclined bottom 400x400

**WS4**

Underframe for glasswasher 400mm

**PHOOG04**

Glass basket for 400x400 glasswashers

**PHOOS02**

Basket in polypropylene for cutlery with 6 compartments

Symbols glossary (TT)



...



5 STAGE FILTER



...