

UG405DMSR

Família	Máquina de lavar louça profissional
Subfamília	Undercounter glasswashers
Dimensões do cesto	Diâmetro 400 mm
Rinse pump	HTR system
Ligação energética	230 V~ / 13 A / 3,0 kW / 50 Hz



Acessórios incluídos

Cesto para talheres	1x PHOOS01	Mangueira de drenagem	Sim - 2m
Cesto de fundo plano	2x RB40G01	Outros cestos e acessórios	1x RB40A3
Mangueira de abastecimento de água	Sim - 1,5m		

Mercado

Soluções	Bares/ Coffee shops/ Wine bars
----------	--------------------------------

Programas

Numero máximo de cestos/hora	40
------------------------------	----

Interface

Display	4 dígitos	Luz indicadora de falta de sal	Sim
Numero de botões	1	Diagnóstico manual	Sim
Luz indicadora On/Off	Sim		

ESPECIFICAÇÕES TÉCNICAS

Tank	Com base estampada	Guias dos cestos	Embutidas
Tipologia	Parede única	Filter	5-stage filter system
Material da cuba	Aço Inox AISI 304	Capacidade da cuba	8 l

Painel traseiro	Porta galvanizada	Capacidade da caldeira	4 l
Filtro da cuba	Plástico	Altura max. de drenagem	600 mm
Junta da porta	Apenas para cima		

Especificações técnicas


Water consumption per cycle	2,3 l	Carga de detergente	1,5 l/h
Temperatura pré-definida de ligação da água	Quente 50°C	Carga de enxaguamento	0,4 l/h
Max. inlet temperature	60°C	Altura de carga operável	330 mm
Dureza máxima da água	54°F - 30°dH	Profundidade com porta aberta	882 mm
Pressão de entrada	1-6 bar / 100-600 kPa	Dimensões de produto LxPxA:	440x530x710 mm

Ligação elétrica

Ficha elétrica	(F;E) Schuko	Wash pump power	290 W
Tank heating element power	2000 W	Ligação pré-definida	3000 W
Boiler heating element power	2700 W		

Equipamentos

Peristaltic detergent dispenser	Controlo eletrónico	Contador de ciclos	Sim
Peristaltic rinse-aid dispenser	Controlo eletrónico	Break tank	Sim
Unidade de medida da dosagem de produtos químicos	gr/lt	Diâmetro do tudo de abastecimento de água	DN15 - ½"
Amaciador automático incorporado	Sim	Ø do tubo de drenagem	DN20-G 3/4"
Rinse boiler Thermostop system	Yes - default	Comprimento da mangueira de detergente (vermelha)	2,2m
Wash pump soft start system	Sim	Comprimento da mangueira de enxaguamento (azul)	2,2m
Option for auto daily switch on	Sim, desligado por definição		

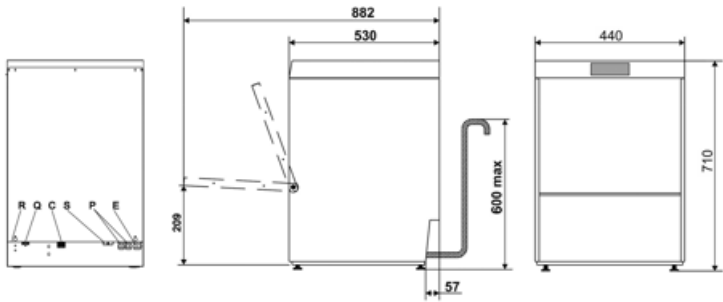

Q	MORSETTO EQUIPOTENZIALE EARTH TERMINAL
E	CAVO ALIMENTAZIONE ELETTRICA ELECTRICITY SUPPLY CABLE
C	TUBO DI CARICO FILLER HOSE
P	TUBI POMPE PERISTALTICHE PERISTALTIC HOSES
T	ENTRATA CAVO DI ALIMENTAZIONE DOSATORE ESTERNO EXTERNAL DISPENSER POWER CABLE ENTRY POINT
S	TUBO DI SCARICO DRAIN HOSE
R	PANNELLO RETRO LOWER BACK PANEL

Acessórios Compatíveis



KITRB40G01

Kit of 2 wire round baskets and adaptor for Ecoline



PHOOS01

Polypropylene single basket for cutlery



PHOOS02

6 compartment polypropylene basket for cutlery



RB40A3

Adapter for round basket for all 400 glasswasher models 460 mm wide



RB40G01

Universal wire basket with flat bottom, dim. (ØxH) 400x140 mm



WB40D01

Wire basket for 8 dishes Ø315 mm, dim. 400x400 mm



WB40G01

Universal wire basket with flat bottom, dim (WxDxH) 400x400x120 mm



WB40G02

Wire basket with sloped bottom for glasses Ø90 mm max, dim. (WxDxH) 400x400x168 mm



WB40G03

Sloped bottom 3 compartments wire basket for glasses Ø120 mm max, dim. (WxDxH) 400x400x168 mm



WH00S01

Wire insert for 12 small dishes



WS4

Stainless steel underframe for glasswashers, dim. (WxDxH) 495x530x490 mm

Benefit (TT)

Interface

Control panel with electronic buttons

The electronic control panel features an intuitive interface with soft-touch buttons, allowing easy selection of one of the three wash programmes: short, medium, or intensive. There are also buttons for power, selection, and cycle start. The display provides real-time monitoring of the tank and boiler temperature, as well as diagnostics, ensuring effortless and immediate control of the main functions.

5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

The presence sensor filter alerts if the filtration system is out of position, ensuring safe washes every time.

HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant temperature of 85°C. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

Integrated softener

Effective water treatment for consistently sparkling glasses

The integrated continuous regeneration water softener ensures effective water treatment, enhancing washing performance and preserving the machine's operational lifespan. The resin regeneration process takes place during the wash cycle without interruptions, providing constant control over water hardness. This system prevents limescale buildup, maximises detergent efficiency, and guarantees spotless results on glassware and dishes.

Door

Split and balanced doors for maximum ergonomics

The split and balanced doors have been designed with the aim of optimising ergonomics during tool loading and unloading operations. Their design allows for easier use, minimising the physical effort required from the operator. This helps improve work efficiency while also ensuring greater comfort and safety in the working environment.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.