

UG415DS-1

Family	Professional dishwasher
Subfamily	Undercounter Glasswasher
Basket dimensions	400x400 mm
Panel	Easyline
Filter	5-stages filter system
Rinse pump H.T.R. system	Yes
Dual heating	Yes
Usable load height	315 mm
Power connection	400 V 3N~ / 10 A / 5,2 kW /50 Hz
Depth with open door	930 mm
Maximum dishes diameter	300 mm
Maximum glasses height	300 mm
Product dimensions WxDxH	460x600x705 mm



Target

Solutions	Coffee shops/Wine bars; Restaurants/Pubs
-----------	---

Aesthetics

Series	Easyline	Led color	Green
Control panel	electronic		

Functions



Functionality	5-stage filter; HTR; Door clearance 315mm
---------------	---

Programs

Programs	6 automatic programs; 1 fully programmable program; Self-cleaning programs; Cold water rinse program
Program options	Extra rinse; Clean water cycle
Program specifications	Boiler 71°C/Tank 60°C - 1'20"; Boiler 85°C/Tank 60°C - 1'10"; Boiler 85°C/Tank 60°C - 1'30"; Boiler 85°C/Tank 60°C - 2'; Boiler 85°C/Tank 60°C - 3'; Boiler 71°C/Tank 60°C - 2'10"; Boiler 85°C/Tank 60°C - 4'10"
Drain and self cleaning cycle	Yes
Maximum basket/hour	51
Maximum dishes/hour	576

Maximum glasses/hour	960
----------------------	-----

Interface

Display	8 digit	Detergent missing alert	Yes
Number of buttons	5	Cycle progress alert	Yes
On/Off button	Yes	End-cycle alert	Yes
Salt alert	Yes	Manual diagnostic	Yes
Rinse aid missing alert	Yes		

Construction

Tank	Deep drawn	Door gasket	On 3 sides
Construction	Double wall	Rack guides	Embossed
Tank material	Stainless steel AISI 304	Tank capacity	7 l
Back panel	Galvanized	Boiler capacity	4 l
Door	Double wall	Noise	Lpa 56 dBA
Balanced door	Yes	Protection class	IPX4
Tank filter	Stainless steel	Adjustable feet	Yes
Washing spray arm	2 in stainless steel	Net weight	47.000 kg
Rinse spray arm	2 in stainless steel	Drain max. height	600 mm

Technical Features

Tank heating element	2000 W	Warm water connection	8°C
Boiler heating element	4300 W	Max temperature inlet water	60°C
Washing pump	300 W	Max water hardness	54°F - 30°dH
Default connection	4800 W	Inlet pressure	100-600 kPa
Water cycle consumption	2,3 l		

Electrical Connection

Plug	Not present	Optional electrical connection	230 V 3~ / 18 A / 5,2 kW / 50 Hz; 230 V~ / 11 A / 2,5 kW / 50 Hz (NC); 230 V~ / 14 A / 3.2 kW / 50 Hz (NC); 230 V~ / 17 A / 3.8 kW / 50 Hz
------	-------------	--------------------------------	--


Equipments

Drain pump	Yes	Detergent load	1,5 l/h
Peristaltic detergent doser	Electronic control	Rinse load	0,4 l/h
Peristaltic rinse-aid doser	Electronic control	Cycle counter	Yes
		Break tank	Yes

Chemicals level probe	Yes, with optional kit KITSONLIV	Partial renewal of water in the tank and built-in drain pump	Yes
Automatic incorporated softener	Yes	Water supply pipe diameter	DN10 - 3/8"
Thermostop system	Yes	Drain supply pipe diameter	DN20-G 3/4"
Soft Start system	Yes	Detergent (red) hose lenght	2,2m
Stand-by system	Yes	Rinse aid (blue) hose lenght	2,2m
Automatic start	Yes, default OFF		

Accessories Included

Glass basket	1x WB40G02	Water supply hose	Yes - 1,5m
Cutlery basket	1x PHOOS01	Drain hose	Yes - 2m
Flat basket	1x WB40G01		

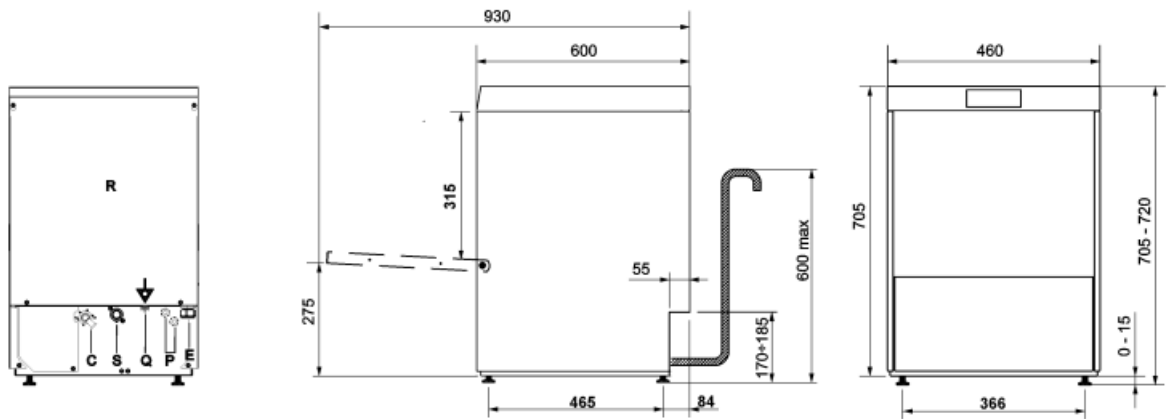

R	PANNELLO RETRO LOWER BACK PANEL
Q	MORSETTO EQUIPOTENZIALE EARTH TERMINAL
P	TUBI POMPE PERISTALTICHE PERISTALTIC HOSES
E	CAVO ALIMENTAZIONE ELETTRICA ELECTRICITY SUPPLY CABLE
S	TUBO DI SCARICO DRAIN HOSE
T	ENTRATA CAVO DI ALIMENTAZIONE DOSATORE ESTERNO EXTERNAL DISPENSER POWER CABLE ENTRY POINT
C	TUBO DI CARICO FILLER HOSE

Not included accessories



RB40G01

Universal wire basket with flat bottom,
Ø 400 mm, h 140 mm

KITSONLIV

Probe level kit for double wall models



PHOOS01

Polypropylene single basket for cutlery



WB40G02

Sloped bottom 4 compartments wire
basket for max 90 mm diameter glasses,
400x400x168 mm



WS4

Underframe for glasswasher 400,
495x530x490 mm



WB40G03

Sloped bottom 3 compartments wire
basket for max 120 mm diameter
glasses, 400x400x168 mm



WB40D01

Wire basket for 16 dishes max diameter
315 mm, 400x400 mm



RB40A4

Adapter for 400 Australian
glasswashers basket




WH00S01

Wire insert for 12 small dishes



WB40G01

Universal wire basket with flat
bottom, 400x400x120 mm



WB40PG4

Wire basket for plastic glasses with
flat bottom, 400X400X210 mm

KITDETKCC400

Kit for detergent (1l) and rinse aid (1l)
storage for glasswasher 400 double
wall



PHO0GR4

Glass basket for 400x400
glasswashers



PHOOS02

6 compartments polypropylene
basket for cutlery



Symbols glossary (TT)



HTR RINSING SYSTEM



Max usable height 315mm



5 STAGE FILTER