

# UW5757DPS

<b>Família</b>	Máquina de lavar louça profissional
<b>Subfamília</b>	Lava-utensílios
<b>Tipo</b>	Lava-utensílios
<b>Louça</b>	Louça; Talheres; EN 600x400 trays; GN1/1 trays; Utensílios
<b>Dimensões do cesto</b>	570x570 mm
<b>Standard drain pump with partial water renewal in the wash tank</b>	Sim
<b>Bomba de enxaguamento</b>	HTR system
<b>Tipo de caldeira</b>	Atmosferic boiler
<b>Bomba de lavagem</b>	Standard
<b>Ligação energética</b>	400 V 3N~ / 22,7 A / 9,0 kW / 50 Hz
<b>Dimensões do produto (LxPxA)</b>	685x750x1710 mm



## Mercado

<b>Indústrias</b>	Hotelaria; Restaurantes / Catering; Padarias / Pastelarias; Indústrias Alimentares; Estabelecimentos de Cuidados; Supermercados / Comércio de alimentos; Catering; Indústrias Alimentares; Talhos
-------------------	---

## Design

<b>Cor dos LEDs</b>	Vermelho
---------------------	----------

## Especificações técnicas

<b>Opção de lavagem dos tabuleiros</b>	Sim	<b>Carga de detergente</b>	1,5 l/h
<b>Consumo de água por ciclo</b>	5 l	<b>Carga de enxaguamento</b>	0,4 l/h
<b>Temperatura de lavagem (mín.-máx)</b>	60 °C	<b>Altura de carga operável</b>	650 mm
<b>Temperatura de enxaguamento (mín.-máx.)</b>	78°C	<b>Altura de porta aberta</b>	1985 mm
<b>Temperatura pré-definida de ligação da água</b>	5°C	<b>Profundidade com porta aberta</b>	1110 mm
		<b>Altura máxima sem cesto</b>	650 mm

Temperatura máxima de entrada: 60°C  
Dureza máxima da água 8°f-5dh / 14°f-8dh

## Programas

Tabela de programas  
Programas de lavagem de utensílios

Lava-utensílios  
120" (92" a 60°C - enxaguamento 18" a 85°C); 240" (212" a 60°C - 10" pausa de escoamento - enxaguamento 18" a 85°C); Sem fim a 60°C - 10" pausa de escoamento - enxaguamento 18" a 85°C  
30

Numero máximo de cestos/hora

## Ligação eléctrica

Potência do elemento de aquecimento do tanque 4500 W  
Potência do elemento de aquecimento da caldeira 7500 W  
Potência da bomba de lavagem 1600W

Ligação pré-definida 9000 W  
Ligação eléctrica opcional 230 V 3~ / 39,5 A / 9,0 kW / 50 Hz  
Ficha eléctrica Não

## Interface

Display 4 dígitos  
Numero de botões 3

Luz indicadora On/Off Sim

## ESPECIFICAÇÕES TÉCNICAS

Cuba Com base estampada  
Tipologia Parede única  
Material da cuba Aço inox AISI 304  
Painel traseiro Porta galvanizada  
Sistema de lavagem superior Um braço de lavagem e um braço de enxaguamento dividido, em aço inoxidável.  
Sistema de lavagem inferior A 3-arms wash and one split rinse spray arms, stainless steel  
Filtro da cuba Aço inox  
Guias dos cestos Soldadas

Filtro 2-stage filter system  
Capacidade da cuba 36 l  
Capacidade da caldeira 12 l  
Ruído LpA<70 dB(A)  
Classe de Protecção IPX4  
Pés ajustáveis Sim  
Altura max. de drenagem 800 mm

## Acessórios incluídos

Cesto de fundo plano 1x WB5757G01  
Mangueria de abastecimento de água Sim - 2,5m


Mangueria de drenagem Sim - 2m

## Equipamentos

Dispensador peristáltico Manual de detergente	Manual	Diâmetro do tudo de abastecimento de água	DN15 - ½"
Dispensador peristáltico Manual de brilhantador	Manual	Ø do tubo de drenagem	DN20-G 3/4"
Sistema Thermostop para caldeira de enxaguamento	Yes - default	Comprimento da mangueira de detergente (vermelha)	2,2 m
Sistema de arranque suave da bomba de lavagem	Sim	Comprimento da mangueira de enxaguamento (azul)	2,2 m
Tanque de Ruptura	Sim		

## Dados de logística

Código EAN	8017709276683	Peso líquido (kg)	135,000 kg
Dimensões do produto embalado (LxPxA)	860x820x1910 mm	Peso bruto (kg)	161,000 kg

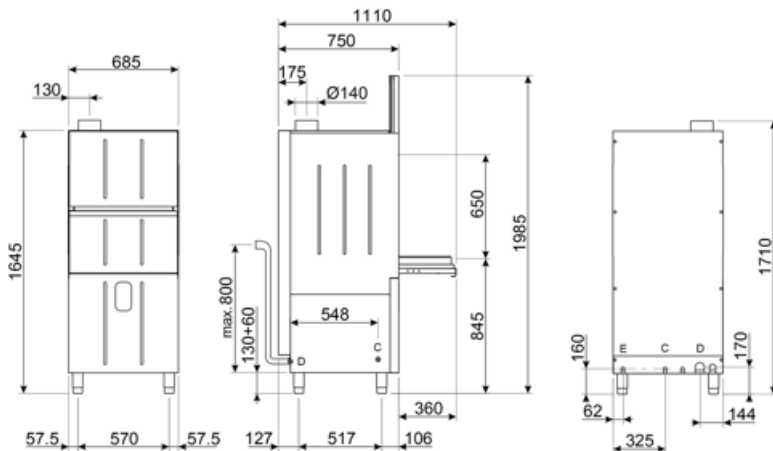

D = SCARICO 1½", VIDANGE 1½", DRAIN 1½", ABFLUSS 1½", DESAGÜE 1½", CIBB 1½"

C = CARICAMENTO ACQUA ½" GAS, CHARGEMENT EAU ½" GAS, WATER INLET ½" GAS, ZUFLUSS ½" GAS, CARGA AGUA ½" GAS, НАПОЛНЕНИЕ ВОДОЙ ½" GAS

E = ALLACCIAMENTO ELETTRICO, BRANCHEMENT ELECTRIQUE, ELECTRIC CONNECTION, ELEKTRISCHER ANSCHLUSS, CONEXION ELECTRICA, ЭЛЕКТРИЧЕСКОЕ ПОДКЛЮЧЕНИЕ

---

## Acessórios Compatíveis

---




### WB5757G01

Universal basket with flat bottom, dim. (WxDxH) 570x570x140 mm



### WB5757T02

Stainless steel basket for 8 trays GN1/1 and EN 600x400, 54 mm tray spacing, dim. (WxDxH) 570x570x255 mm



### WH00S02

Basket for utensils, dim. (WxDxH) 150x150x250 mm



### WB5757T01

Stainless steel basket for 5 trays GN1/1 and EN 600x400, 90 mm tray spacing, dim. (WxDxH) 570x570x255 mm



### WH00B02

Block for sac à poche

## Benefit (TT)

---

### Interface

Control panel with electronic buttons

The electronic control panel features an intuitive interface with soft-touch buttons, allowing easy selection of one of the three wash programmes: short, medium, or intensive. There are also buttons for power, selection, and cycle start. The display provides real-time monitoring of the tank and boiler temperature, as well as diagnostics, ensuring effortless and immediate control of the main functions.

### 2-stage system

Two-stage filtration system to ensure optimal washing performance and maximum water purity

The filtration system is entirely made of AISI 304 stainless steel, ensuring maximum resistance, durability, and corrosion protection. It consists of two filtration stages: the first features a grid that prevents dirt residues from entering the tank, thereby avoiding water clouding; the second protects the washing pumps by retaining any debris that may accidentally enter the tank during filter cleaning.

### HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant rinsing temperature according to the program setting. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

### Door

Split and balanced doors for maximum ergonomics

The split and balanced doors have been designed with the aim of optimising ergonomics during tool loading and unloading operations. Their design allows for easier use, minimising the physical effort required from the operator. This helps improve work efficiency while also ensuring greater comfort and safety in the working environment.

### Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

### Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.