

UW60132D

Family	Professional dishwasher
Subfamily	Utensilwasher
Line	Utensil washer
Basket dimensions	600x1320 mm
Rinse pump	HTR system
Washing pump	Standard



Accessories Included

Cutlery basket	1x WH00S02	Water supply hose	Yes - 2,5m
Grids	1x WB60132G02	Drain hose	Yes - 2m

Target

Solutions	Restaurants/Pubs; Bakery/Pastry making; Frozen bakery industry; Other food industry; Catering and Institutions
-----------	--

Programs

Utensil washers programs	120" (92" at 60°C - rinse 18" at 85°C); 240" (212" at 60°C - 10" dripping pause - rinse 18" at 85°C); Endless at 60°C - 10" dripping pause - rinse 18" at 85°C
Maximum basket/hour	30
Maximum dishes/hour	

Interface

Display	4 digit	On/Off button	Yes
Number of buttons	3		

Construction

Tank	With printed base	Rack guides	Welded
Tank material	Stainless steel AISI 304	Hood elevation system	Manual
Back panel	Galvanized	Tank capacity	130 l
Door	Double wall	Boiler capacity	17 l
Upper washing system	Two 3-arms washing and two split rinse spray arms, stainless steel	Protection class	IPX4
Lower washing system	Two 4-arms washing and two split rinse spray arms, stainless steel	Adjustable feet	Yes
Tank filter	Stainless steel	Drain max. height	230 mm

Technical Features


Trays washing option	Yes	Max temperature inlet water	60°C
Tank heating element power	6000 W	Max water hardness	12°f - 7°dH
Boiler heating element power	12000 W	Detergent load	1,5 l/h
Default connection	18600 W	Rinse load	0,4 l/h
UW washing pump	3x2200W	Usable load height	850 mm
Water cycle consumption	7,5	Height open door	2430 mm
Minimum water cycle consumption	1,8 l	Depth with open door	1255 mm
Warm water connection	5°C	Product dimensions WxDxH	1450x865x2095 mm

Electrical Connection

Plug	Not present	Optional electrical connection	230 V~ / 29 A / 18 kW / 50 Hz
Power connection	400 V 3N~ / 18 kW / 50 Hz		

Equipments

Peristaltic detergent doser	Manual	Water supply pipe diameter	DN15 - ½"
Peristaltic rinse-aid doser	Manual	Drain supply pipe diameter	DN20-G 3/4"
Boiler thermostop	Yes - default	Detergent (red) hose lenght	2,2m
Soft Start system	Yes	Rinse aid (blue) hose lenght	2,2m
Break tank	Yes		

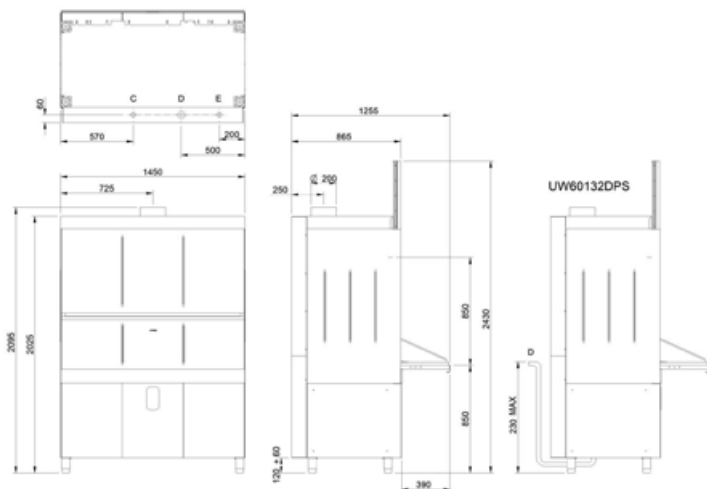


D = SCARICO 1/2", VIDANGE 1/2", DRAIN 1/2", ABFLUSS 1/2", DESAGÜE 1/2", CIBIB 1/2"

C = CARICAMENTO ACQUA 1/2" GAS, CHARGEMENT EAU 1/2" GAZ, WATER INLET 1/2" GAS, ZUFLUSS 1/2" GAS, CARGA AGUA 1/2" GAS, HAROP BOÏM 1/2" GAS

E = ALLACCIAMENTO ELETTRICO, BRANCHEMENT ÉLECTRIQUE, ELECTRIC CONNECTION, ELEKTRISCHER ANSCHLUSS, CONEXION ELECTRICA, ЭЛЕКТРИЧЕСКОЕ ПОДКЛЮЧЕНИЕ

Not included accessories



WB60132G02

Utensilwasher grid, dim. (WxDxH)
1320x600 mm




WB6070G01

Universal basket with flat bottom,
dim. (WxDxH) 700x600x305 mm



WH00B02

Block for sac à poche



WH00S02

Basket for utensils, dim. (WxDxH)
150x150x250 mm

Symbols glossary



SUITABLE FOR EURONORM TRAY



SUITABLE FOR GASTRONORM
TRAY



HTR RINSING SYSTEM



MAX.USABLE HEIGHT 850mm